


LED Compact Work Light - Model 892

PRODUCT INFORMATION

Description	12-24V LED Work Light Pedestal Mount
Height	120.40 mm / 4.74 in
Width	99.90 mm / 3.93 in
Depth	44.56 mm / 1.75 in
Shape	Square
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 8mm-20 x 25mm Mounting Bolt Bracket
Mounting Type	Pedestal
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	60 °C / 140 °F
Mating Connector	Deutsch DT06-2S-E003
Product Weight	0.90 lbs / 0.41 kgs
Shipping Weight	1.03 lbs / 0.47 kgs



PRODUCT DIMENSIONS

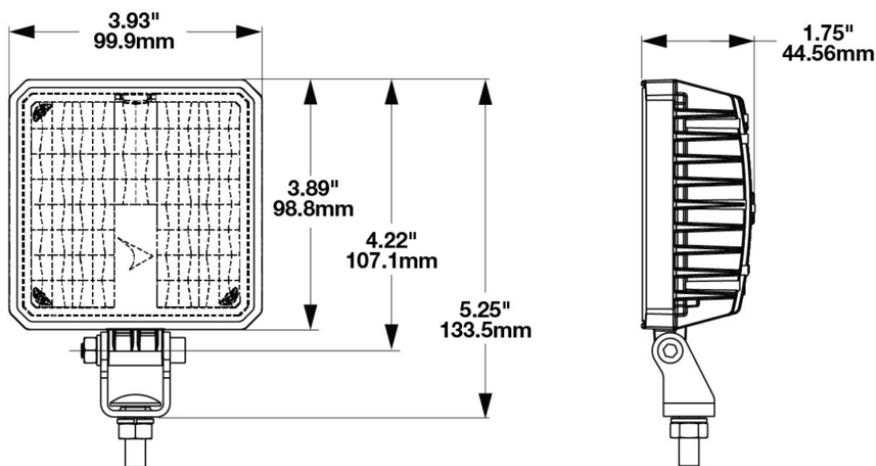

Print date: 2026-03-17

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Compact Work Light - Model 892

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-30V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Power
Black Wire	Ground
Current Draw	4.38A @ 12V DC (Power) 1.84A @ 24V DC (Power)


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	ECE Reg 10
Eco Friendly	IEC IP67
IEC IP69K	

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	6372
Effective Lumen Output	3300
Candela Output	5839
Nominal LED Color Temperature	5050 K

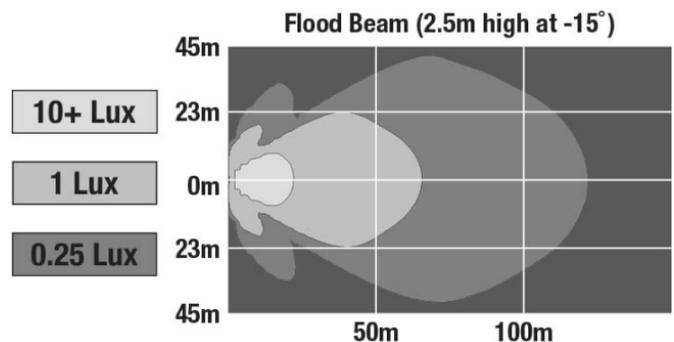

Print date: 2026-03-17

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Compact Work Light - Model 892

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number

8201241

DIN Pole Mount for
Work Lights

Print date: 2026-03-17

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660