

Model Bobcat LED Headlight

PRODUCT INFORMATION

Description	12/24V Bobcat Right-Hand LED Headlight
Height	153.00 mm / 6.02 in
Width	153.00 mm / 6.02 in
Depth	41.00 mm / 1.61 in
Shape	Triangle
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
Mating Connector	Connector Metri PE12059450-B BLACK 2-pin
Product Weight	0.81 lbs / 0.37 kgs
Shipping Weight	1.06 lbs / 0.48 kgs




Print date: 2026-04-27

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Model Bobcat LED Headlight

PRODUCT DIMENSIONS

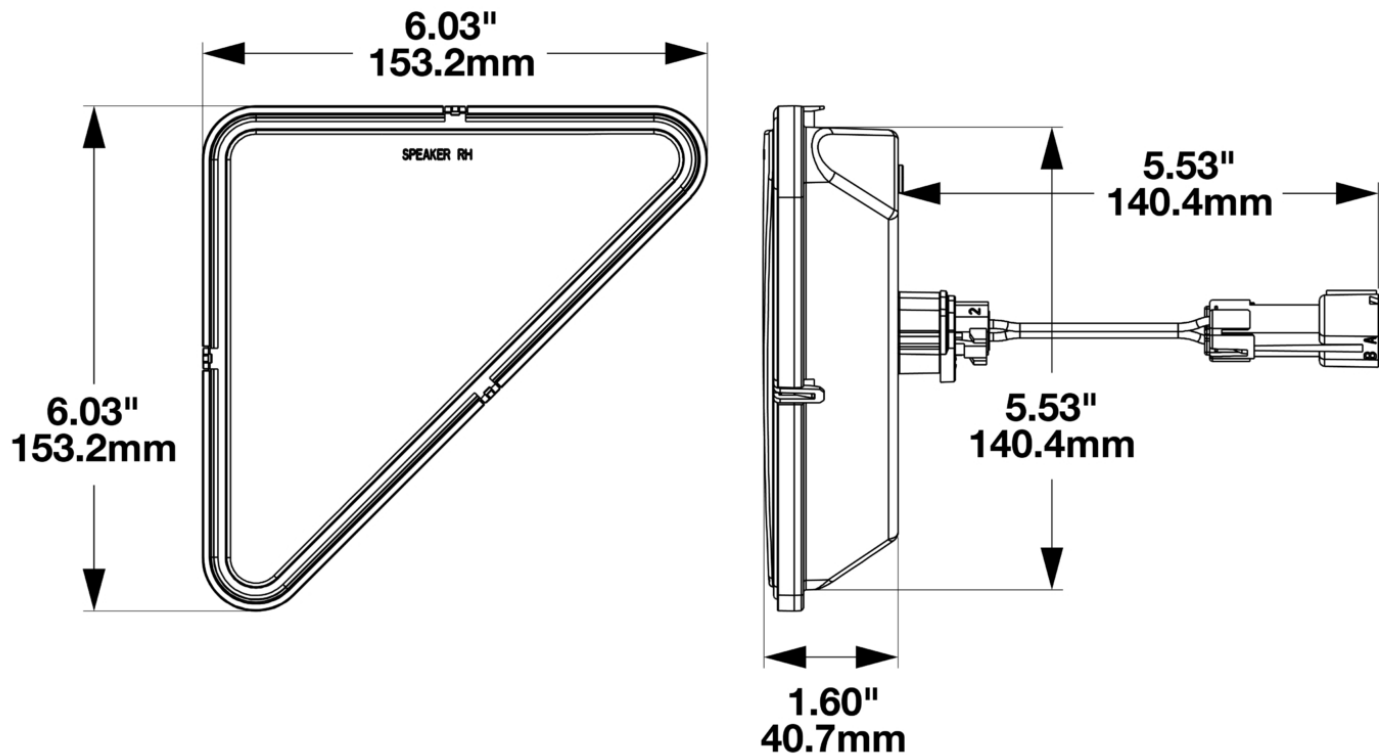

ELECTRICAL SPECIFICATIONS


Input Voltage	12/24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Red Wire	Power
Current Draw	2.2A @ 12V DC 1.1A @ 24V DC

Print date: 2026-04-27

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Model Bobcat LED Headlight

REGULATORY STANDARDS COMPLIANCE



IEC IP69K
SAE J1455

SAE J1113-13

PHOTOMETRIC SPECIFICATIONS

Effective Lumen Output 1000

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number
1000041
12/24V Bobcat Left-
Hand LED Headlight



BOBCAT RIGHT HAND HEADLIGHT BOBCAT LEFT HAND HEADLIGHT

Part Number
1000093
12/24V Bobcat LH &
RH LED Headlight - 2
Light Kit

Print date: 2026-04-27

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660