Oval LED Work Light - Model 7251 XD

PRODUCT INFORMATION

Description 12-24V LED Work Light with Spot Beam

Pattern & Panel Mount

 Height
 152.40 mm / 6 in

 Width
 170.18 mm / 6.7 in

 Depth
 68.58 mm / 2.7 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black
Bezel Color N/A

Mounting Hardware (x1) 3/8-16 x 1.5" Stainless Steel Hex

Description Head Bolt

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature


Connector or WiringDeutsch DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.80 lbs / 0.36 kgsShipping Weight2.50 lbs / 1.13 kgs





Oval LED Work Light - Model 7251 XD

PRODUCT DIMENSIONS

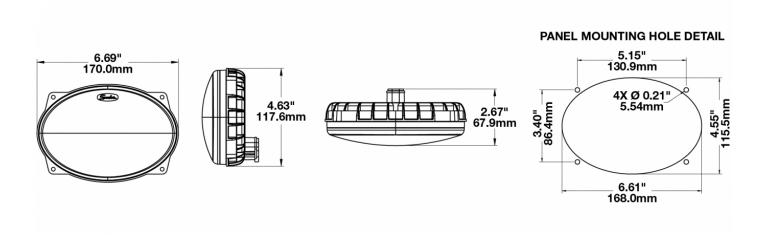

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-32V DCBlack WireGroundRed WirePower

Current Draw 1.60A @ 12V DC 0.90A @ 24V DC

REGULATORY STANDARDS COMPLIANCE









Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP69K SAE J1113-13

UL Recognized



Oval LED Work Light - Model 7251 XD

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,150 **Effective Lumen** 1,500


Output

Nominal LED Color

Temperature

Beam Pattern(s) Forward Lighting - Spot

5000 K

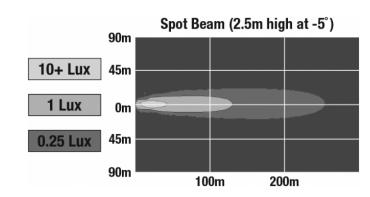

APPLICATIONS















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS





with Trapezoid Beam

Part Number 1801551

with Flood Beam Pattern & Panel Mount Pattern & Panel Mount

Print date: 2025-11-19

