# Oval LED Work Light - Model 7251 XD

### PRODUCT INFORMATION

**Description** 12-24V LED Work Light with Flood Beam

Pattern & Panel Mount

 Height
 152.40 mm / 6 in

 Width
 170.18 mm / 6.7 in

 Depth
 68.58 mm / 2.7 in

**Shape** Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black
Bezel Color N/A

**Mounting Hardware** (x1) 3/8-16 x 1.5" Stainless Steel Hex

**Description** Head Bolt

**Minimum Operating**  $-40~^{\circ}\text{C} / -40~^{\circ}\text{F}$ 

Temperature

**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 

**Temperature** 


Connector or WiringDeutsch DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.80 lbs / 0.36 kgsShipping Weight2.50 lbs / 1.13 kgs





# Oval LED Work Light - Model 7251 XD

### **PRODUCT DIMENSIONS**

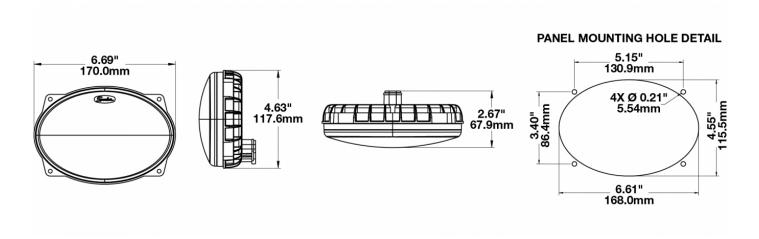

### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-24V DCOperating Voltage10-32V DCBlack WireGroundRed WirePower

**Current Draw** 1.60A @ 12V DC 0.90A @ 24V DC

### **REGULATORY STANDARDS COMPLIANCE**









Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP69K SAE J1113-13

**UL Recognized** 



## Oval LED Work Light - Model 7251 XD

### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,150 **Effective Lumen** 1,400

**Output** 

**Nominal LED Color** 


**Temperature** 

Beam Pattern(s) Forward Lighting - Flood

(Standard)

5000 K

Forward Lighting - Trapezoid

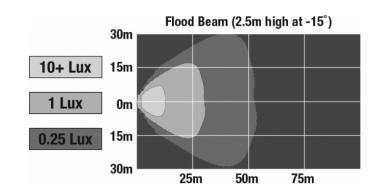

### **APPLICATIONS**















### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

#### **RELATED PRODUCTS**







**Part Number** 1801541

with Trapezoid Beam Pattern & Panel Mount Pattern & Panel Mount

Print date: 2024-04-26

