Oval LED Work Light - Model 7250 XD

PRODUCT INFORMATION

Description 12-24V LED Work Light with Trapezoid

Beam Pattern & Pedestal Mount

 Height
 152.40 mm / 6 in

 Width
 170.18 mm / 6.7 in

 Depth
 68.58 mm / 2.7 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Bezel Color N/A

Mounting Hardware Description (x1) 3/8-16 x 1.5" Stainless Steel Hex

Head Bolt

65 °C / 149 °F

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating

Temperature


Connector or WiringDeutsch DT04-2PMating ConnectorDeutsch DT06-2S

Shipping Weight 2.80 lbs / 1.27 kgs



Oval LED Work Light - Model 7250 XD

PRODUCT DIMENSIONS

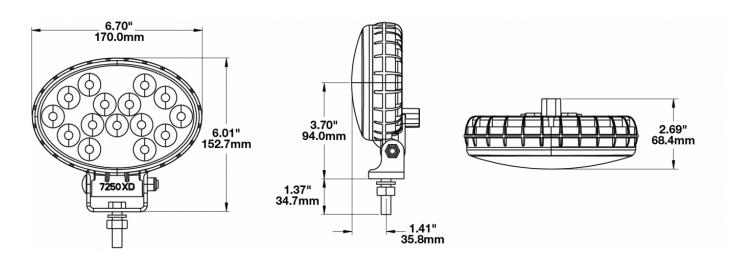

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-32V DCBlack WireGroundRed WirePower

Current Draw 1.60A @ 12V DC 0.90A @ 24V DC

REGULATORY STANDARDS COMPLIANCE









Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP69K SAE J1113-13

UL Recognized







Oval LED Work Light - Model 7250 XD

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,150 **Effective Lumen** 1,400

Output


Nominal LED Color

Temperature

Beam Pattern(s)

5000 K

Forward Lighting - Trapezoid

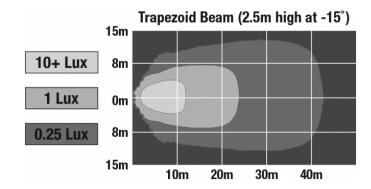

APPLICATIONS













RELATED PRODUCTS



Part Number 1801501

with Spot Beam Pattern & Pedestal Mount



Part Number 1801521

12-24V LED Work Light 12-24V LED Work Light with Flood Beam Pattern & Pedestal Mount

