Oval LED Work Lights - Model 7250 XD

PRODUCT INFORMATION

Description 12-24V LED Work Light with Flood Beam

Pattern & Pedestal Mount

152.40 mm / 6 in Height Width 170.18 mm / 6.7 in 68.58 mm / 2.7 in **Depth**

Shape Oval

Polycarbonate **Outer Lens Material**

Outer Lens Color Clear

Polycarbonate **Housing Material**

Housing Color Black

Mounting Hardware (x1) 3/8-16 x 1.5" Stainless Steel Hex

Description Head Bolt -40 °C / -40 °F Minimum Operating

Temperature


Maximum Operating 65 °C / 149 °F


Temperature

Connector or Wiring Deutsch DT04-2P **Mating Connector** Deutsch DT06-2S **Product Weight** 0.80 lbs / 0.36 kgs **Shipping Weight** 2.80 lbs / 1.27 kgs



PRODUCT DIMENSIONS

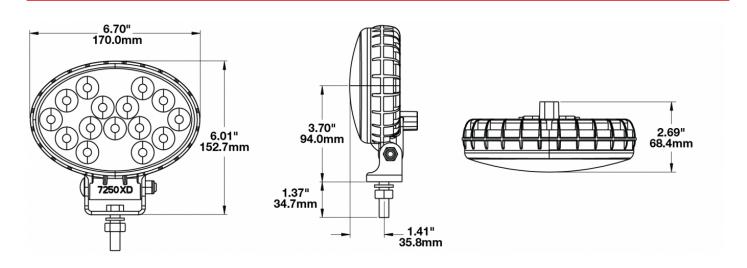



Oval LED Work Lights - Model 7250 XD

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-32V DCBlack WireGroundRed WirePower

Current Draw 1.60A @ 12V DC

0.90A @ 24V DC

REGULATORY STANDARDS COMPLIANCE









Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP69K SAE J1113-13

UL Recognized

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3715 **Effective Lumen** 2142


Output

Nominal LED Color 5700 K

Temperature

Beam Pattern(s) Forward Lighting - Flood

(Standard)

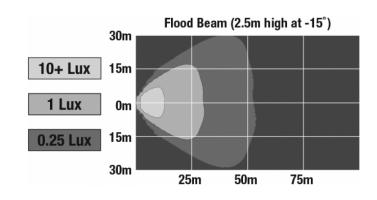



Oval LED Work Lights - Model 7250 XD

APPLICATIONS















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number 1801501 with Spot Beam Pattern & Pedestal Mount



Part Number

1801511 12-24V LED Work Light 12-24V LED Work Light with Trapezoid Beam Pattern & Pedestal Mount