Oval LED Work Lights - Model 7250 XD

PRODUCT INFORMATION

Description 12-24V LED Work Light with Flood Beam

Pattern & Pedestal Mount

 Height
 152.40 mm / 6 in

 Width
 170.18 mm / 6.7 in

 Depth
 68.58 mm / 2.7 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x1) 3/8-16 x 1.5" Stainless Steel Hex

Description Head Bolt **Minimum Operating** -40 °C / -40 °F

Temperature


Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$


Temperature

Connector or WiringDeutsch DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.80 lbs / 0.36 kgsShipping Weight2.80 lbs / 1.27 kgs



PRODUCT DIMENSIONS

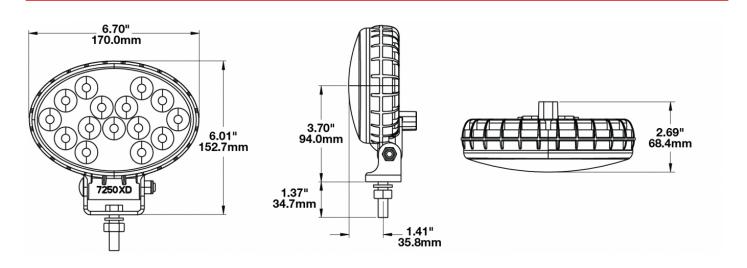



Oval LED Work Lights - Model 7250 XD

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage10-32V DCBlack WireGroundRed WirePower

Current Draw 1.60A @ 12V DC

0.90A @ 24V DC

REGULATORY STANDARDS COMPLIANCE









Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP69K SAE J1113-13

UL Recognized

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3715 **Effective Lumen** 2142


Output

Nominal LED Color 5700 K

Temperature

Beam Pattern(s) Forward Lighting - Flood

(Standard)

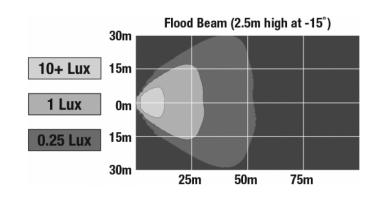



Oval LED Work Lights - Model 7250 XD

APPLICATIONS















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number 1801501 with Spot Beam Pattern & Pedestal

Mount



Part Number

1801511 12-24V LED Work Light 12-24V LED Work Light with Trapezoid Beam Pattern & Pedestal Mount

