

MODEL 9901 POWER, PERFORMANCE, PRECISION

Never Miss a Moment

The Model 9901 LED Auxiliary Driving High Beam is your go-to solution for exceptional illumination and reliability. Designed for those who demand the best, this powerful 13"x3" high beam light bar ensures you never miss a detail, delivering superior performance in even the most demanding environments.

The Model 9901 produces a high-intensity beam with a luminous output of 1,650 effective lumens, delivering long-range visibility. With 1 Lux at 496 meters (about half a kilometer) down the road, it provides exceptional forward lighting distance, allowing drivers to detect obstacles and hazards well in advance.







Model 9901 is available at your authorized J.W. Speaker dealer. For more information & technical specifications, go to www.jwspeaker.com

MODEL 9901

EXTREME DURABILITY

The Model 9901 is a high-performance LED auxiliary high beam light bar designed to enhance visibility and safety for various vehicles, including caravans, pickup trucks, transport vehicles and heavy-duty trucks.



Power Through Darkness


The Model 9901 Auxiliary Driving High Beam is meticulously designed to enhance both visibility and performance. Engineered for long-range illumination, it projects a focused, far-reaching beam that allows drivers to see well down the road, critical for detecting hazards early and maintaining safe reaction times. Built to meet ECE regulations for auxiliary high beams, it makes it perfectly suited for on-road use. Its durable, robust construction ensures longevity and reliability, even in harsh environments, while its powerful light output makes it ideal for high-speed applications where maximum visibility is essential.

The Model 9901 is also available with J.W. Speaker's state-of-theart SmartHeat® Technology, designed to keep you moving in harsh winter conditions. This intelligent system automatically activates to heat the lens, minimizing snow and ice buildup. With SmartHeat®, the Model 9901 ensures optimal performance no matter how severe the weather.

Key Specifications:

- 12-24 Input Voltage
- 9,800 Raw & 1,650 Effective Lumen Output
- 150,000 Candela Output
- 1 Lux at 496 Meters
- SmartHeat® Option Available •
- Rated IP67 •
- Meets ECE Reg 149 & ECE Reg 10



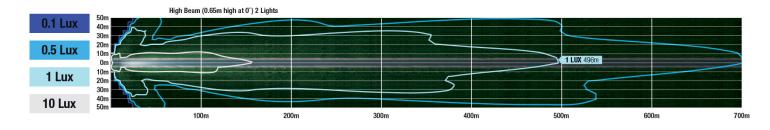

Model 9901 LED Auxiliary Driving High Beam

Part No.	Description
0561521	12-24V ECE LED Auxiliary High Beam Light with Bracket Mount
0561531	12-24V ECE LED Heated Auxiliary High Beam Light w/ Bracket Mount

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov AVERTISSMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov





N120 W19434 Freistadt Road PO Box 1011, Germantown, Wisconsin 53022 USA

