

### PRE-INSTALLATION INFORMATION




**You will reuse the following hardware from your Model 527 Lamp:**

- (x2) M8-1.25 x 24mm hex bolts
- (x4) #6-19 x .357" SS Screws
- (x2) Ratcheting Plastic Holders

#### In the Box

- A. (x1) Rock guard bracket
- B. (x1) Lamp mounting bracket
- C. (x1) Rubber dampner
- D. (x1) Tie wrap
- E. (x2) M10 lock washers
- F. (x2) M10 - 1.5 x 40mm carriage bolts
- G. (x2) M10 - 1.5 Hex nuts

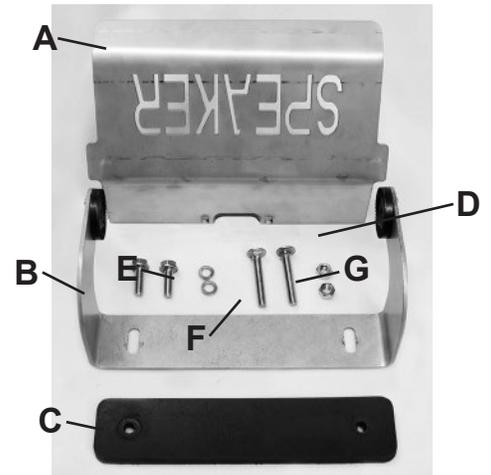


### PRODUCT WARRANTY:

**If you have issues with a J.W. Speaker product, please contact the authorized retailer where you purchased it.**

**1.** Remove the four #6-19 x .357" screws, two M8-1.25x24MM hex bolts, and 2 ratcheting plastic holders from the sides of the existing lamp mounting bracket for the Model 527 RED light. You can dispose of the existing lamp mounting bracket.




**2.** Install the lamp mounting bracket (B) on the Model 527 RED light using the two ratcheting plastic holders, four #6-19 x .357" screws and two M8-1.25x24MM hex bolts.

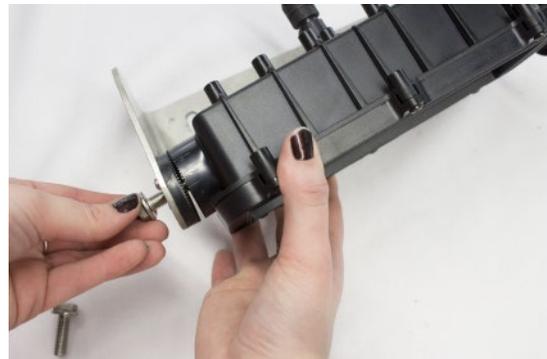

**3.** Rotate the Model 527 RED light in the ratcheting plastic holders to the desired light output angle.



**4.** Tighten the two M8-1.25x24MM hex bolts with a wrench to lock the lamp into place.

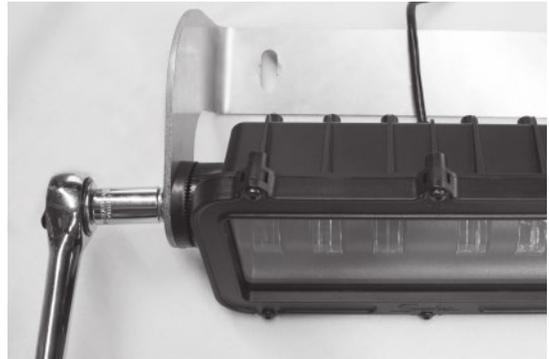

**5.** Align the lamp assembly, rubber damper (C) and the rock guard bracket (A), so that the rubber damper (C) is sandwiched between the lamp mounting bracket (B) and the rock guard bracket (A).



**6.** Route the Model 527 RED light power cord through the rock guard bracket access hole as shown.



**7.** Use the two M10-1.5x40mm carriage bolts (F), M10 lock washers (E) and M10 hex nuts (G) to mount the complete assembly to the vehicle.



**8.** Use the tie wrap (D) to secure the lamp power cord to the rock guard bracket (A).

