# **PRODUCT INFORMATION**

**Description** 12-24V DOT/ECE LED RHT Low Beam

Rectangular

Heated Headlight with Chrome Bezel

 Height
 107.19 mm / 4.22 in

 Width
 167.64 mm / 6.6 in

 Depth
 84.90 mm / 3.34 in

Outer Lens Material Hardcoated Polycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing ColorBlackBezel ColorChrome

Mounting Type Low-Profile Panel Mount

**Retrofits** 1A1 and 2A1 (4" 1 6") sealed beams

Minimum Operating -40 °C / -40 °F

**Temperature** 

Shape

**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 

**Temperature** 

Connector or WiringH4 Connector - AMP (#172615-2)Mating ConnectorLH Terminal - AMP (#172795-1); RH

Terminal - AMP (#172796-1)

**Product Weight** 2.00 lbs / 0.91 kgs **Shipping Weight** 2.30 lbs / 1.04 kgs










# **PRODUCT DIMENSIONS**

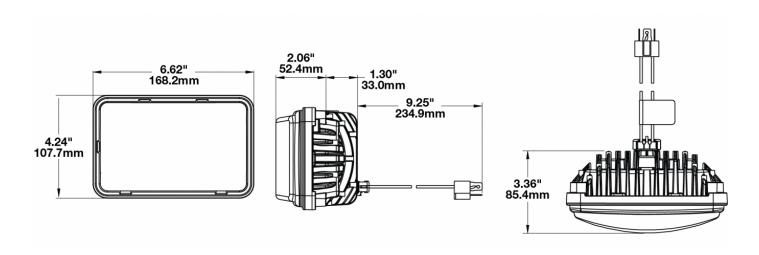

# **ELECTRICAL SPECIFICATIONS**

Input Voltage 12-24V DC
Operating Voltage 9-32V DC
White Wire Low Beam
Black Wire Ground
Yellow Wire Low Beam
Current Draw 3.30A @ 12V DC
1.67A @ 24V DC

# REGULATORY STANDARDS COMPLIANCE







ECE Reg 112







Buy America Standards

FMVSS 108 s10.1 (Table XIX)

Eco Friendly IEC IP69K

Print date: 2025-06-14



### PHOTOMETRIC SPECIFICATIONS

**Raw Lumen Output** 2,830 **Effective Lumen** 782

Output

**Candela Output** 29,800 **Nominal LED Color** 5000 K


**Temperature** 

**Beam Pattern(s)** Forward Lighting - Low Beam

(DOT)

Forward Lighting - Low Beam (ECE

Right Hand)

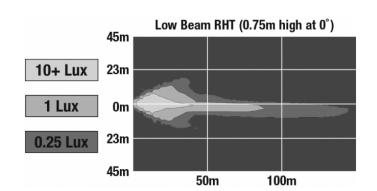

#### **APPLICATIONS**

























# **SMARTHEAT™ HEATING SYSTEM**

The SmartHeat<sup>™</sup> heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

#### When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

# When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology here.



# **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

**AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

# **ACCESSORIES**





<u>Part Number</u> <u>3269601</u>

Low Beam Harness for 8800 Evolution 2 Series Part Number 3269611

High Beam Harness for 8800 Evolution 2 Series



# **RELATED PRODUCTS**



**Part Number** 0551371 12-24V DOT/ECE LED **RHT Low Beam** Headlight with Chrome with Chrome Bezel Bezel



**Part Number** 0551381 12-24V DOT/ECE LED High Beam Headlight



**Part Number** 0551781 12-24V DOT/ECE LED High Beam Heated Headlight with Chrome Headlight with Black Bezel



**Part Number** 0552551 12-24V DOT/ECE LED RHT Low Beam Bezel



**Part Number** 0552571 12-24V DOT/ECE LED High Beam Headlight with Black Bezel



Part Number 0552651 12-24V DOT/ECE LED RHT Low Beam Heated Headlight with Black Bezel



0552671 12-24V DOT/ECE LED High Beam Heated Headlight with Black Bezel

**Part Number** 

