PART NUMBER 0346724

Heated Oval LED Signal Light - Model 274

PRODUCT INFORMATION

Description	12-24V DOT LED Heated White Reverse Light with Harness
Height	57.00 mm / 2.24 in
Width	165.50 mm / 6.52 in
Depth	21.00 mm / 0.83 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Bezel Color	Clear
Mounting Type	Grommet/Flange Bracket
Retrofits	Standard 2" x 6" Signal Lights
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	50 °C / 122 °F
Mating Connector	3-Pin AMP Connector (282087-1)
Product Weight	0.35 lbs / 0.16 kgs
Shipping Weight	1.35 lbs / 0.61 kgs
Additional Information	Part Number Includes Wiring Harness 3270501



MODEL 274

SmartHeat
HEATED LIGHTING TECHNOLOGY

Print date: 2026-11-11


© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.

www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.


Heated Oval LED Signal Light - Model 274

PRODUCT DIMENSIONS

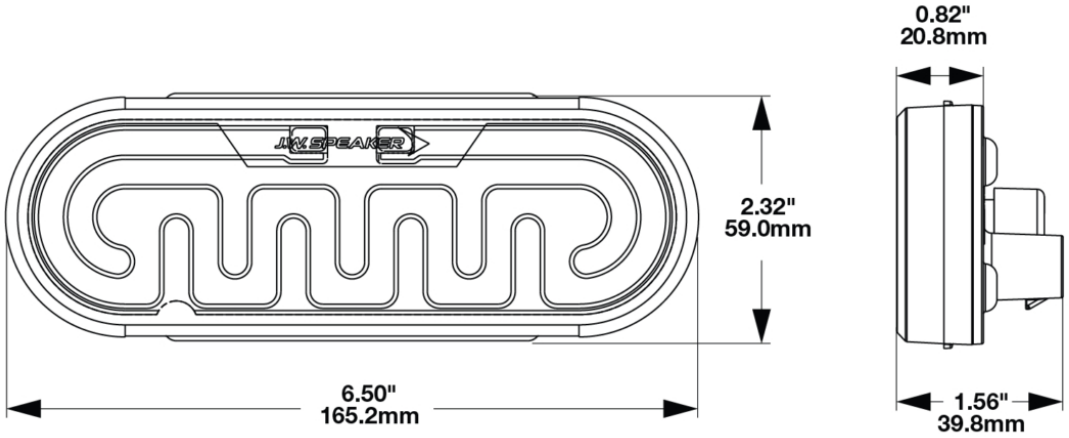


Pin Out Information

LIGHT *(Socket shown ↑ top)*



WIRE HARNESS*

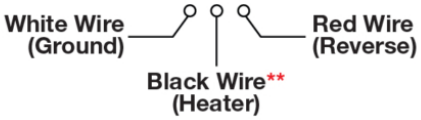

**Wire harness sold separately on Part # 0346721.*
Wire harness included on Part # 0346724.
Also available as a single accessory (Part # 3270501)

****To operate heating circuit on the Reverse Lamp, a separate constant 12V DC power line must be wired.***

Print date: 2026-11-11
© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® *Engineered. Lighting. Solutions.*

PART NUMBER 0346724

Heated Oval LED Signal Light - Model 274

ELECTRICAL SPECIFICATIONS

Input Voltage	10-30V DC
Operating Voltage	12-24V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
White Wire	Ground
Black Wire	Heater Only
Red Wire	Reverse
Current Draw	0.85A @ 12V DC (Reverse) 0.85A @ 24V DC (Reverse) 1.9A @ 12V DC (Reverse Heated) 1.9A @ 24V DC (Reverse Heated)

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
FMVSS 108 s7.6 (Table XII)

Eco Friendly
SAE J593

APPLICATIONS



INSTALLATION & APPLICATION INFORMATION

Installation requires the white wire (Heater) to be powered in order for the heater to work. If power is not supplied to the heater, the light will not be heated. Current Draws will differ based upon whether or not the heater is active. Turn off power before installing.

Print date: 2026-11-11
© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.

Heated Oval LED Signal Light - Model 274

PRODUCT WARNINGS

For California residents:
⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.
⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.


ACCESSORIES



Part Number 4242891
Rubber Mounting Grommet for Model 274



Part Number 5870261
Plastic Mounting Flange for Model 274



Part Number 8200581
Steel L-Shaped Mounting Bracket for Model 274



Part Number 8200591
Chrome Plastic Trim Ring for Model 274



Part Number 3270501
3-Pin AMP Connector Wire Harness Assembly

Print date: 2026-11-11
© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.

Heated Oval LED Signal Light - Model 274

RELATED PRODUCTS



Part Number 0346701
12-24V DOT LED Heated Red Stop, Tail, & Turn Light



Part Number 0346704
12-24V DOT LED Heated Red Stop, Tail, & Turn Light with Harness



Part Number 0346711
12-24V DOT LED Heated Amber Rear Turn Light



Part Number 0346714
12-24V DOT LED Heated Amber Rear Turn Light with Harness



Part Number 0346721
12-24V DOT LED Heated White Reverse Light



Part Number 0346781
12-24V DOT LED Heated Amber Front Position & Front Turn Signal Light



Part Number 0346784
12-24V DOT LED Heated Amber Front Position & Front Turn Signal Light with Harness



Part Number 0346791
12-24V DOT LED Heated Amber Side Marker Light

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.