

Heated Oval LED Signal Light - Model 274

PRODUCT INFORMATION

Description	12-24V DOT LED Heated Amber Side Marker Light with Harness
Height	57.00 mm / 2.24 in
Width	165.50 mm / 6.52 in
Depth	21.00 mm / 0.83 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Bezel Color	Amber
Mounting Type	Grommet/Flange Bracket
Retrofits	Standard 2" x 6" Signal Lights
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	50 °C / 122 °F
Mating Connector	3-Pin AMP Connector (282087-1)
Product Weight	0.35 lbs / 0.16 kgs
Shipping Weight	1.35 lbs / 0.61 kgs
Additional Information	Part Number Includes Wiring Harness 3270501




Print date: 2025-08-13

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.


Heated Oval LED Signal Light - Model 274

PRODUCT DIMENSIONS

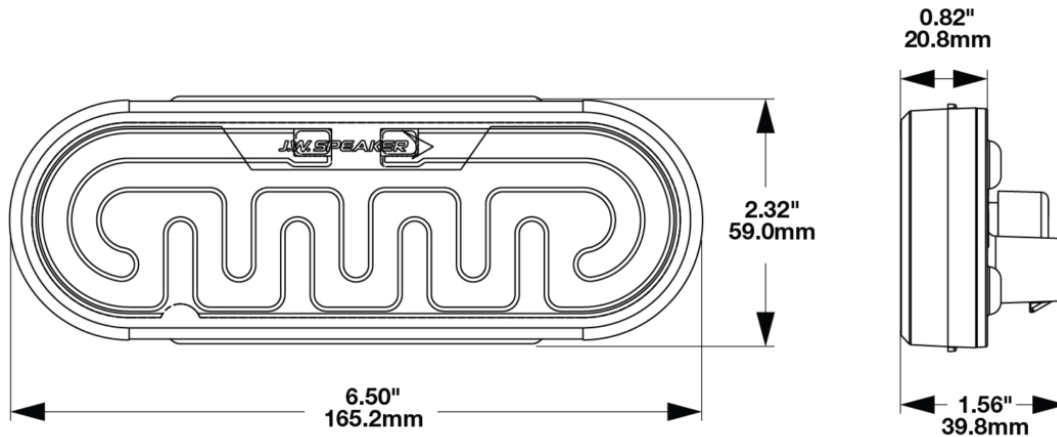

Pin Out Information

LIGHT (Socket shown ↑ top)



WIRE HARNESS*



*Wire harness sold separately on Part # 0346791.

Wire harness included on Part # 0346794.

Also available as a single accessory (Part # 3270501)


The black wire on the does not need to be connected to a power source for the Side Marker Lamp to function.

Heated Oval LED Signal Light - Model 274

ELECTRICAL SPECIFICATIONS

Input Voltage	10-30V DC
Operating Voltage	12-24V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pul
White Wire	Ground
Black Wire	No Function
Red Wire	Side Marker w/Heater
Current Draw	1A @ 12V DC (Sidemarker Heated) 1A @ 24V DC (Sidemarker Heated)

REGULATORY STANDARDS COMPLIANCE

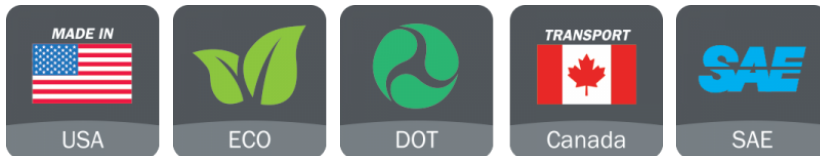

Buy America Standards
FMVSS 108 s7.4 (Table X)

Eco Friendly
SAE J592

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Marker

APPLICATIONS



INSTALLATION & APPLICATION INFORMATION

Power supplied in any mode will power the heater. If power is not supplied to the heater, the light will not be heated. Turn off power before installing.

Print date: 2025-08-13

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

Heated Oval LED Signal Light - Model 274

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number
4242891

Rubber Mounting
Grommet for Model
274



Part Number
5870261

Plastic Mounting
Flange for Model 274



Part Number
8200581

Steel L-Shaped
Mounting Bracket for
Model 274



Part Number
8200591

Chrome Plastic Trim
Ring for Model 274




Part Number
3270501

3-Pin AMP Connector
Wire Harness
Assembly

Heated Oval LED Signal Light - Model 274

RELATED PRODUCTS



Part Number
0346701

12-24V DOT LED
Heated Red Stop, Tail,
& Turn Light



Part Number
0346704

12-24V DOT LED
Heated Red Stop, Tail,
& Turn Light with
Harness



Part Number
0346711

12-24V DOT LED
Heated Amber Rear
Turn Light



Part Number
0346714

12-24V DOT LED
Heated Amber Rear
Turn Light with
Harness



Part Number
0346721

12-24V DOT LED
Heated White Reverse
Light



Part Number
0346724

12-24V DOT LED
Heated White Reverse
Light with Harness



Part Number
0346781

12-24V DOT LED
Heated Amber Front
Position & Front Turn
Signal Light



Part Number
0346784

12-24V DOT LED
Heated Amber Front
Position & Front Turn
Signal Light with
Harness