

LED Signal Lights - Model 223

PRODUCT INFORMATION

Description	12-24V ECE LED Front Position/Front Turn Signal Light
Height	127.00 mm / 5 in
Width	127.00 mm / 5 in
Depth	48.26 mm / 1.9 in
Shape	Square
Outer Lens Material	Acrylic
Outer Lens Color	Amber, Clear
Housing Material	ABS
Housing Color	Black
Mounting Hardware Description	(x2) M6-1 x 25 Mounting Bolts
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 4-Pin Deutsch Socket (DT04-4P)
Mating Connector	4-Pin Deutsch Plug (DT06-4S)
Product Weight	0.46 lbs / 0.21 kgs
Shipping Weight	0.46 lbs / 0.21 kgs




Print date: 2018-08-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Signal Lights - Model 223

PRODUCT DIMENSIONS

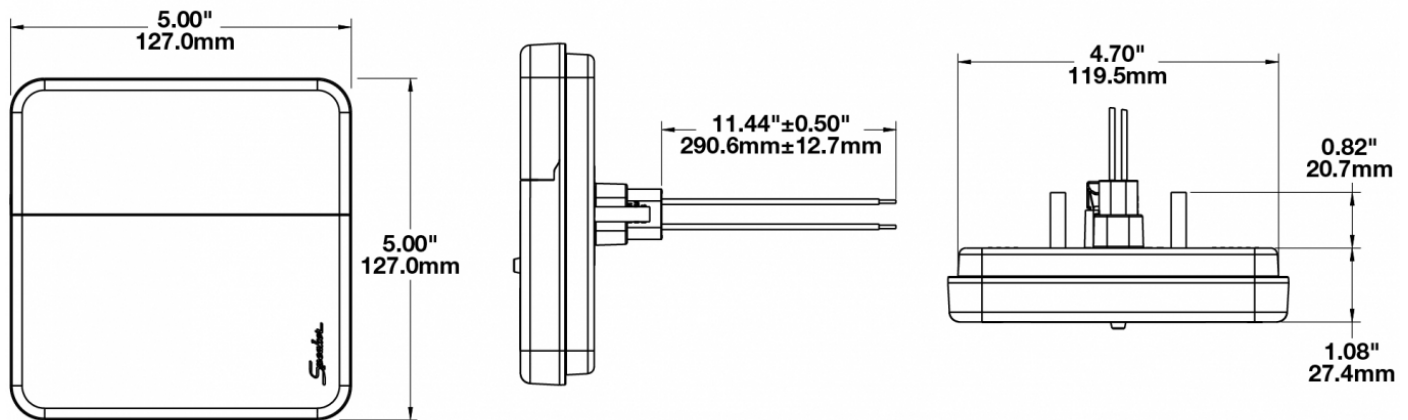

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Black Wire	Ground
White Wire	Position
Yellow Wire	Turn
Current Draw	2.250 A @ 12V DC (Turn) 0.250 A @ 12V DC (Front Position)

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
ECE Reg 7

ECE Reg 6
Eco Friendly

Print date: 2018-08-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Signal Lights - Model 223

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Front Position
Signalization - Turn (Front)
Signalization - Turn (Rear)

APPLICATIONS



RELATED PRODUCTS



Part Number
0341701
12-24V ECE LED Stop,
Tail & Turn Signal Light
with Harness

Print date: 2018-08-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660