PRODUCT INFORMATION

Description 12-24V ECE LED LHT Low Beam Heated

Headlight with Black Bezel

107.19 mm / 4.22 in Height Width 167.64 mm / 6.6 in 84.90 mm / 3.34 in **Depth**

Rectangular Hardcoated Polycarbonate **Outer Lens Material**

Outer Lens Color Clear

Die-Cast Aluminum **Housing Material**

Housing Color Black **Bezel Color** Black

Mounting Type Low-Profile Panel Mount

Retrofits 1A1 and 2A1 (4" 1 6") sealed beams

Minimum Operating -40 °C / -40 °F

Temperature

Shape

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring H4 Connector - AMP (#172615-2) **Mating Connector** LH Terminal - AMP (#172795-1); RH


Terminal - AMP (#172796-1)

Product Weight 2.00 lbs / 0.91 kgs **Shipping Weight** 2.30 lbs / 1.04 kgs










PRODUCT DIMENSIONS

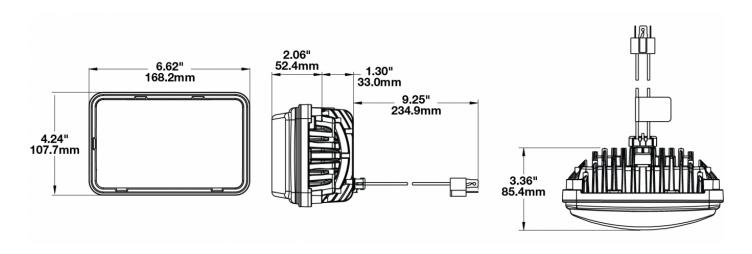

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC
Operating Voltage 9-32V DC
White Wire Low Beam
Black Wire Ground
Yellow Wire Low Beam
Current Draw 3.30A @ 12V DC
1.67A @ 24V DC

REGULATORY STANDARDS COMPLIANCE














Buy America Standards

ECE Reg 112

Eco Friendly

FMVSS 108 s10.1 (Table XIX)

IEC IP69K



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,830 **Effective Lumen** 782


Output

Candela Output 29,800 **Nominal LED Color** 5000 K

Temperature

Beam Pattern(s) Forward Lighting - Low Beam (ECE

Left Hand)

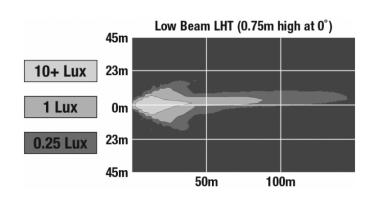

APPLICATIONS

























SMARTHEAT™ HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology <u>here</u>.



PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES





<u>Part Number</u> <u>3269601</u>

Low Beam Harness for 8800 Evolution 2 Series Part Number 3269611

High Beam Harness for 8800 Evolution 2 Series

RELATED PRODUCTS



Part Number 0551371 12-24V DOT/ECE LED RHT Low Beam Headlight with Chrome with Chrome Bezel

Bezel



Part Number 0551381 12-24V DOT/ECE LED High Beam Headlight



Part Number 0551391 12-24V ECE LED LHT Low Beam Headlight with Chrome Bezel



Part Number 0551771 12-24V DOT/ECE LED RHT Low Beam Heated Headlight with Chrome Bezel



Part Number 0551781 12-24V DOT/ECE LED High Beam Heated Headlight with Chrome Bezel



Part Number 0552091 12-24V ECE LED LHT Low Beam Heated Headlight with Chrome Bezel



Part Number 0552551 12-24V DOT/ECE LED **RHT Low Beam** Headlight with Black Bezel



Part Number 0552561 12-24V ECE LED LHT Low Beam Headlight with Black Bezel