LED Compact Rectangular Work Light - Model 893

PRODUCT INFORMATION

Description 12-24V LED Work Light with Pedestal

Mount

 Height
 70.00 mm / 2.76 in

 Width
 196.00 mm / 7.72 in

 Depth
 45.00 mm / 1.77 in

ShapeRectangularOuter Lens MaterialPolycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlack

Mounting Hardware (x1) 8mm-20 x 25mm Mounting Bolt

DescriptionBracketMounting TypePedestalMinimum Operating-40 °C / -40 °F

Temperature

Maximum Operating $85 \, ^{\circ}\text{C} \, / \, 185 \, ^{\circ}\text{F}$


Temperature


Mating ConnectorDeutsch DT06-2S-E003Product Weight1.02 lbs / 0.46 kgsShipping Weight1.30 lbs / 0.59 kgs





PRODUCT DIMENSIONS

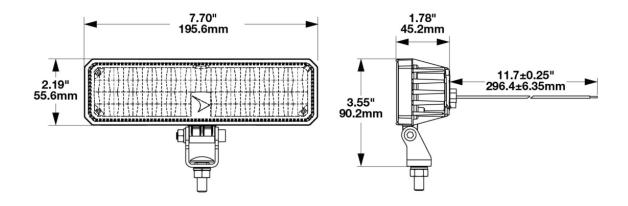





LED Compact Rectangular Work Light - Model 893

ELECTRICAL SPECIFICATIONS

Input Voltage 9-32V DC
Operating Voltage 12-24V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Power
Black Wire Ground

Current Draw 4.5A @ 12V DC (Power) 1.8A @ 24V DC (Power)

REGULATORY STANDARDS COMPLIANCE











Buy America Standards ECE Reg 10
Eco Friendly IEC IP67

IEC IP69K


PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 7120 **Effective Lumen** 3700

Output

Candela Output 6230 **Nominal LED Color** 5050 K

Temperature

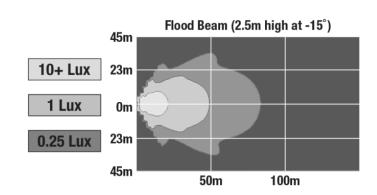

LED Compact Rectangular Work Light - Model 893

APPLICATIONS













PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number 8201241 DIN Pole Mount for Work Lights

RELATED PRODUCTS





Part Number 1300811 12-24V LFD Anti

12-24V LED Anti-Glare, Eco-Friendly Work Light with Pedestal Mount Part Number 1300831

12-24V LED Dual Color Work Light with Pedestal Mount

Print date: 2025-12-21

