


LED Safety Light - Model 4415

PRODUCT INFORMATION

| | |
|--------------------------------------|--|
| Description | 12-110V LED Blue Warning Light |
| Height | 110.00 mm / 4.33 in |
| Width | 85.20 mm / 3.35 in |
| Depth | 56.90 mm / 2.24 in |
| Shape | Round |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x1) M8-20 x 1.25 Mounting Bolt Black ZP |
| Mounting Type | Pedestal |
| Mating Connector | Packard Delphi 12059183 |
| Product Weight | 1.40 lbs / 0.64 kgs |
| Shipping Weight | 1.10 lbs / 0.5 kgs |



PRODUCT DIMENSIONS

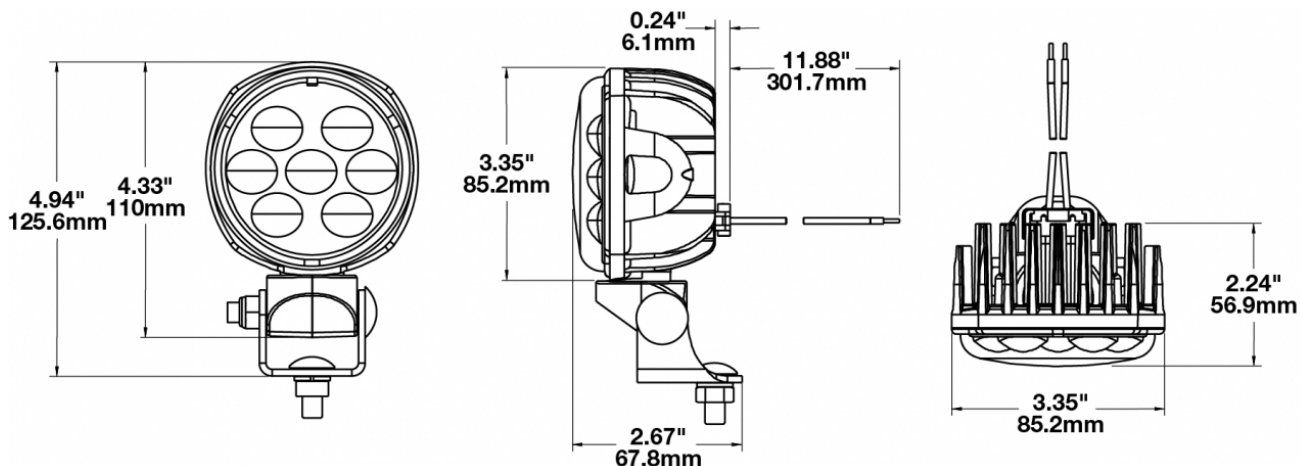

Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Safety Light - Model 4415

ELECTRICAL SPECIFICATIONS

| | |
|----------------------|---|
| Input Voltage | 12-110V DC |
| Red Wire | Power |
| Black Wire | Ground |
| Current Draw | 1.50A @ 12V DC 1.05A @ 24V DC 0.51A @ 48V DC 0.40A @ 60V DC 0.25A @ 110V DC |

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67

Eco Friendly
UL Recognized

PHOTOMETRIC SPECIFICATIONS

| | |
|-------------------------------|-------------------------|
| Effective Lumen Output | 258 |
| Candela Output | 10,268 |
| Beam Pattern(s) | Warning - Keep Out Zone |

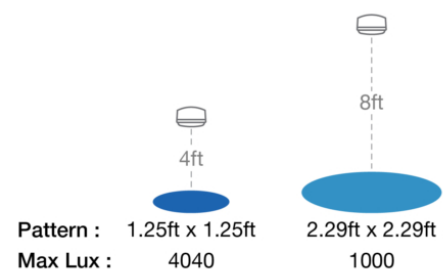


Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Safety Light - Model 4415

APPLICATIONS

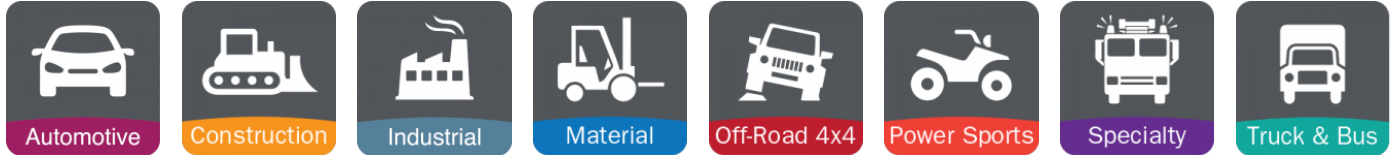

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number

0552981

12-110V LED Red
Warning Light