
### **PRODUCT INFORMATION**

| Description                      | 12-48V LED Work Light with Spot Beam<br>Pattern & DT04-2P Connector |
|----------------------------------|---|
| Height                           | 137.16 mm / 5.4 in  |
| Width                            | 144.02 mm / 5.67 in   |
| Depth                            | 56.90 mm / 2.24 in  |
| Shape                            | Oval  |
| Outer Lens Material              | Polycarbonate   |
| Outer Lens Color                 | Clear   |
| Housing Material                 | Polycarbonate   |
| Housing Color                    | Black   |
| Mounting Hardware<br>Description | (x1) 5/16"-18 x 1.25" Mounting Bolt                                 |
| Mounting Type                    | Universal Pedestal Mount  |
| Minimum Operating<br>Temperature | -40 °C / -40 °F   |
| Maximum Operating<br>Temperature | 65 °C / 149 °F  |
| Connector or Wiring              | Integrated 2-Pin Deutsch Weather-Proof<br>Socket (DT04-2P)          |
| Mating Connector                 | 2-Pin Deutsch Weather-Proof Plug<br>(DT06-2S)                       |
| Product Weight                   | 0.86 lbs / 0.39 kgs   |
| Shipping Weight                  | 0.54 lbs / 0.24 kgs   |

Work Light with Spot Beam F04-2P Connector 8 x 1.25" Mounting Bolt destal Mount



### **PRODUCT DIMENSIONS**

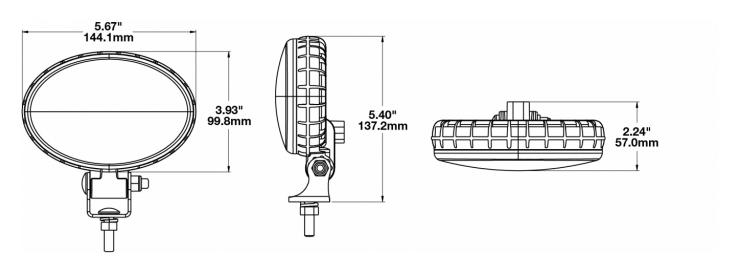

## **ELECTRICAL SPECIFICATIONS**

| Input Voltage              | 12-48V DC   |
|----------------------------|---|
| Operating Voltage          | 10-55V DC   |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses                                       |
| Red Wire                   | Positive  |
| Black Wire                 | Negative  |
| Current Draw               | 1A @ 12V DC<br>0.48A @ 24V DC<br>0.32A @ 36V DC<br>0.25A @ 48V DC |




### **REGULATORY STANDARDS COMPLIANCE**



**Buy America Standards** CISPR 12 CISPR 22 IEC IP67 Tested to ECE Reg. 10 (Radiated Emissions only)

Eco Friendly SAE J1113-13 **UL** Recognized

#### PHOTOMETRIC SPECIFICATIONS

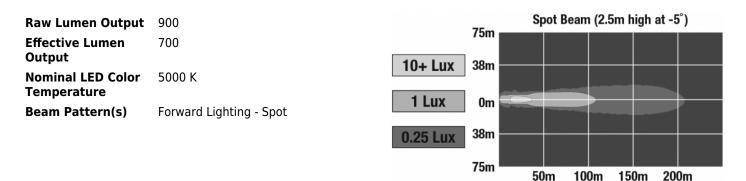

#### **APPLICATIONS**







### **PRODUCT WARNINGS**

For California residents: **WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

#### **ACCESSORIES**



Part Number

8200011 Magnet Mount Kit for **XD Series Work Lights** 



Part Number 8200101 Stainless Steel Mounting Kit for Work Lights & Marine Lights



Part Number 8200491 Mounting Kit For Work Lights

#### **RELATED PRODUCTS**



Part Number 1706041 12V LED Work Light with Flood Beam Pattern & DT04-2P Connector



**Part Number** 1706051 12V LED Work Light with Trapezoid Beam Pattern & DT04-2P Connector



Part Number 1706241 with Flood Beam Pattern & DT04-2P Connector



Part Number 1706251 with Trapezoid Beam Pattern & DT04-2P

Connector



**Part Number** 1706461 12-48V LED Work Light 12-48V LED Work Light 12-48V LED Work Light with Flood Beam Pattern & PE12015792 Connector

