

# LED Lights - Model 784 XD Kit

## PRODUCT INFORMATION

<b>Description</b>	12-24V ECE LED Daytime Running Light - 2 Light Kit
<b>Height</b>	54.10 mm / 2.13 in
<b>Width</b>	169.67 mm / 6.68 in
<b>Depth</b>	45.21 mm / 1.78 in
<b>Shape</b>	Rectangle
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Polycarbonate
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) 3/8"-16 x 1.5" Mounting Bolt
<b>Mounting Type</b>	Universal Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	Integral DT04-2P
<b>Mating Connector</b>	Deutsch DT06-2S
<b>Additional Information</b>	Kit includes (2) lamps, (1) relay kit and (1) instruction.




Print date: 2018-06-25

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
 Engineered. Lighting. Solutions.

# LED Lights - Model 784 XD Kit

## PRODUCT DIMENSIONS

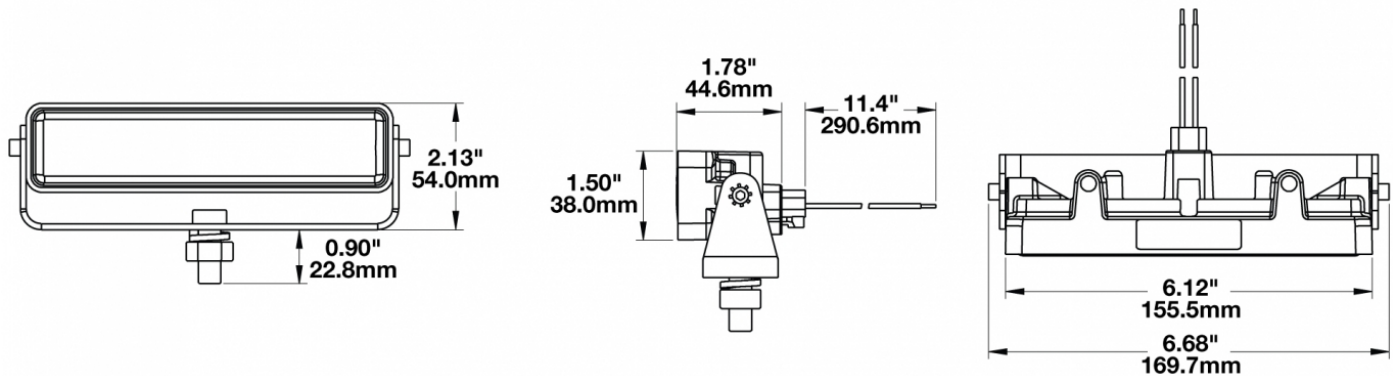

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12-24V DC
<b>Operating Voltage</b>	9-36V DC
<b>Transient Spike Protection</b>	150V Peak @ 1 HZ-100 Pulses
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Current Draw</b>	0.28A @ 12V DC (DRL) 0.17A @ 24V DC (DRL)

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards  
Eco Friendly

ECE Reg 87  
IEC IP67

Print date: 2018-06-25

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Lights - Model 784 XD Kit

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	240
<b>Effective Lumen Output</b>	140
<b>Candela Output</b>	700
<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Forward Lighting - Daytime Running Light

## APPLICATIONS



Print date: 2018-06-25

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

