

Dimensions in inches (mm in parentheses).  
Dimensions are for reference only.

### Product List

Model Number	Description
523-12V	12V DC LED Portable Side Mount Scene Light
523-120V	120V AC LED Portable Side Mount Scene Light

### Features & Benefits

- 8,100 Raw Lumens; 3,900 Effective Lumens
- Available in 12V DC or 120V AC configurations
- Wide Flood, Medium Flood & Narrow Flood beam patterns available
- Durable glass lens stands up to harsh environmental conditions
- Rugged solid state LEDs can withstand shock & vibration
- Long-lasting LEDs mean never having to replace another bulb again!
- Die-cast aluminum housing provides maximum protection
- Easy operation power switch on the power cord

### General Specifications

<b>Lens Pattern :</b>	Wide Flood, Medium Flood, or Narrow Flood
<b>Lens Material :</b>	Glass
<b>Light Configuration :</b>	Cool White or Warm White
<b>Warranty:</b>	4-year Limited Warranty
<b>Housing Material :</b>	Die-Cast Aluminum
<b>Connector:</b>	Integrated NEMA 5-15 Plug (120V Version); 10m Power Cord with Cigarette Lighter Plug (12V Version)

### Technical Specifications

12V DC Version	120V AC Version
12V DC Input	120V AC Input
8.00 Amps @ 12V DC	0.60 Amps @ 120V AC
Raw Lumen Output: 8100	Raw Lumen Output: 8100
Effective Lumen Output: 3900	Effective Lumen Output: 3900

### Standards Compliance


ETL Conformance to UL 153	ETL Conformance to CSA C22.2 No. 12
Sealed to IP67	

### Applications


Agricultural	Construction	Fire & Rescue
Forestry	Industrial	Law Enforcement
Marine	Military	Mining
Utility		

# Model 523

**Narrow Flood Pattern (2.5m high, -5°)** 86.4 Max.

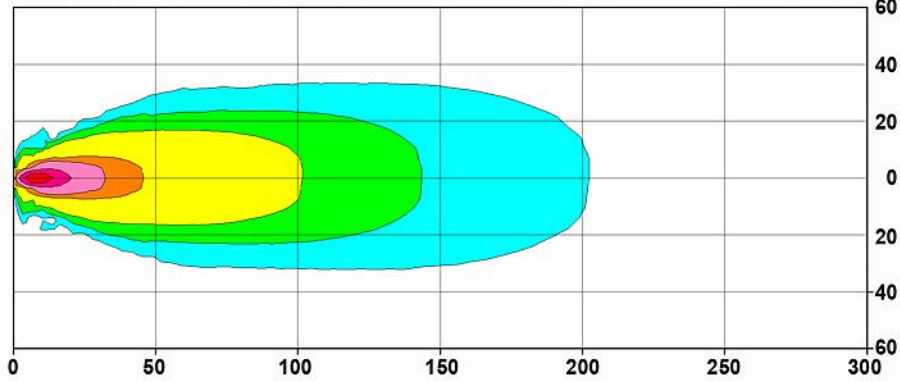

**Medium Flood Pattern (2.5m high, -15°)** 89.4 Max.

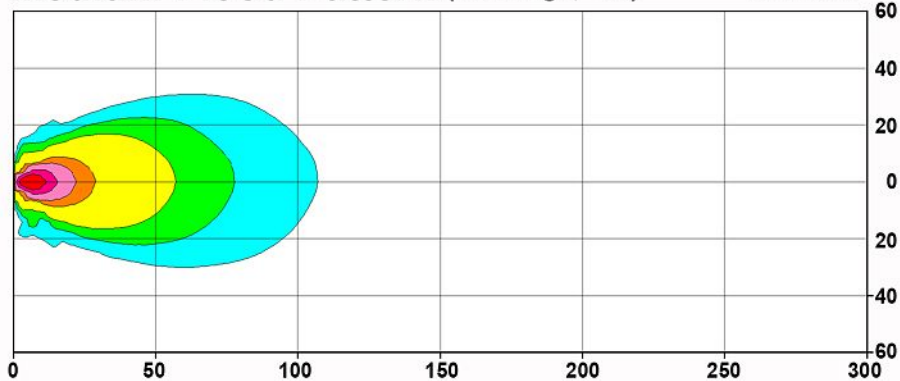

**Wide Flood Pattern (2.5m high, -15°)** 50.0 Max.

