LED Compact Work Light - Model 792

PRODUCT INFORMATION

Description 12/24V Compact LED Work Light with

Pedestal Mount

 Height
 76.10 mm / 3 in

 Width
 98.80 mm / 3.89 in

 Depth
 43.40 mm / 1.71 in

Shape Rectangular

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlack

Mounting Hardware (x1) 5/16"-18 x 1.00" Mounting Bolt

DescriptionBracketMounting TypePedestalMinimum Operating-40 °C / -40 °F

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Mating Connector JAE Connector MX19A003S51 harness

included with flying leads

Product Weight 0.42 lbs / 0.19 kgs **Shipping Weight** 11.13 lbs / 5.05 kgs








LED Compact Work Light - Model 792

PRODUCT DIMENSIONS

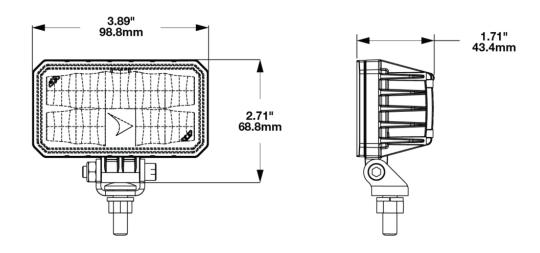

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage9-30V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Power
Black Wire Ground

Current Draw 2.2A @ 12V DC (Power) 1.0A @ 24V DC (Power)

REGULATORY STANDARDS COMPLIANCE





IEC IP67 IEC IP69K

Tested to ECE Reg. 10 (Radiated Emissions only)



LED Compact Work Light - Model 792


PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3630 **Effective Lumen** 2000

Output

Candela Output 2900 **Nominal LED Color** 5050 K

Temperature

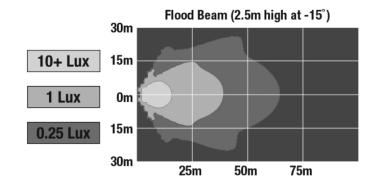

APPLICATIONS











PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number 1603921 12/24V Compact LED Work Light with

Pedestal Mount



1603931 36/90V Compact LED Work Light with Pedestal Mount

Part Number



Part Number

1603932 36/90V Compact LED Work Light with Pedestal Mount (BULK with Harness)



Part Number 1603951 12/24V Compact LED Work Light with Panel Mount



Part Number 1603971 36/90V Compact LED Work Light with Panel Mount

