

LED Headlights - Model 8700 EVO 2 PRO

PRODUCT INFORMATION

Description	12-24V ECE RHT High & Low Beam Headlight with DRL & Chrome Inner Bezel - Single Light
Height	176.53 mm / 6.95 in
Width	176.53 mm / 6.95 in
Depth	99.82 mm / 3.93 in
Shape	Round
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Gray
Bezel Color	Chrome
Retrofits	2D1 "PAR56" or 7" Round Headlights
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	H4
Mating Connector	H4 AMP#172615-2
Product Weight	2.31 lbs / 1.05 kgs
Shipping Weight	3.35 lbs / 1.52 kgs




Print date: 2025-08-19

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

LED Headlights - Model 8700 EVO 2 PRO

PRODUCT DIMENSIONS

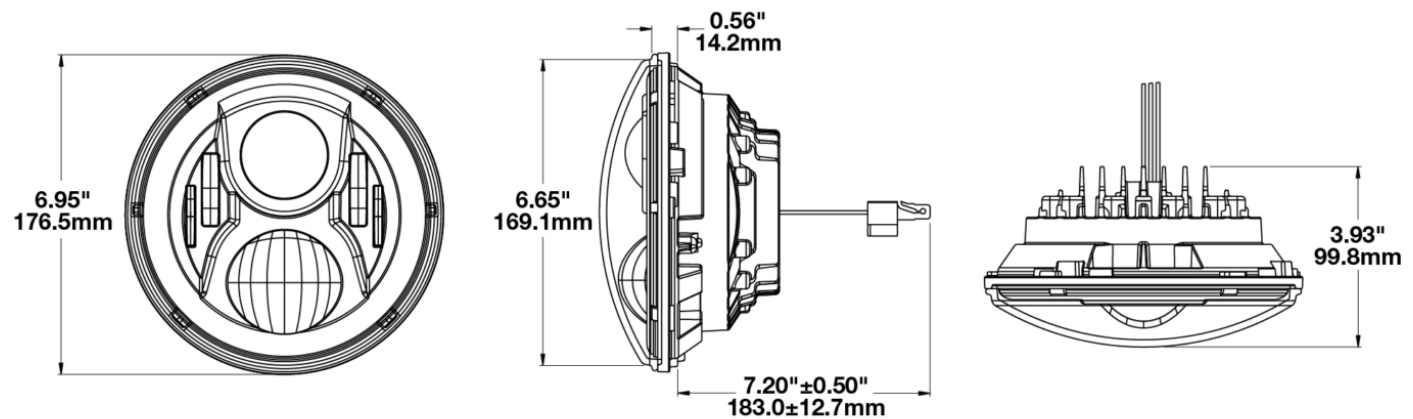

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Yellow Wire	Low Beam
White Wire	High Beam
Red Wire	Front Position
Blue Wire	DRL
Current Draw	3.60A @ 12V DC (High Beam)
	2.00A @ 12V DC (Low Beam)
	1.80A @ 24V DC (High Beam)
	1.10A @ 24V DC (Low Beam)
	1.60A @ 12V DC (DRL)
	0.80A @ 24V DC (DRL)
	0.16A @ 12V DC (Front Position)
	0.10A @ 24V DC (Front Position)

Print date: 2025-08-19

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Headlights - Model 8700 EVO 2 PRO


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	ECE Reg 10
ECE Reg 112	ECE Reg 7
ECE Reg 87	Eco Friendly
IEC IP67	

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	4,170 (High Beam); 2,340 (Low Beam)
Effective Lumen Output	1,340 (High Beam); 694 (Low Beam)
Candela Output	84,700 (High Beam); 30,600 (Low Beam)
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Daytime Running Light Forward Lighting - High Beam (ECE) Forward Lighting - Low Beam (ECE Right Hand) Signalization - Front Position

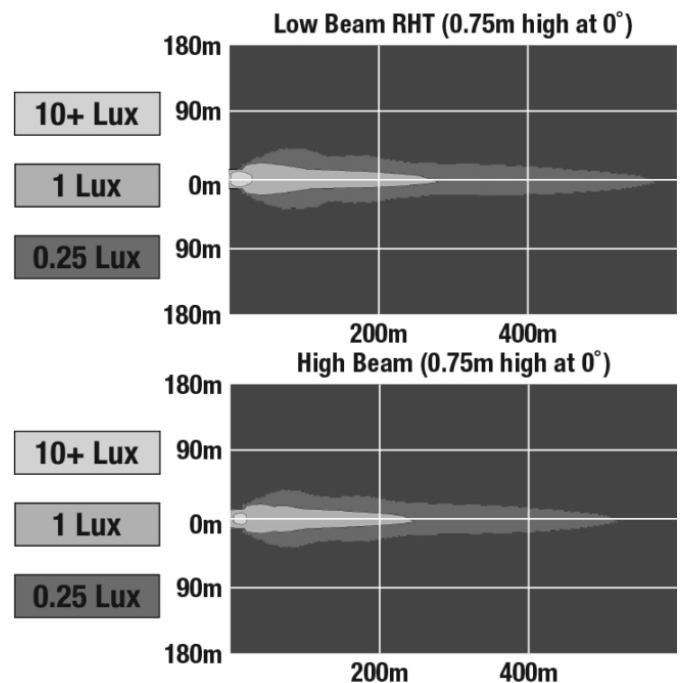


Print date: 2025-08-19

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
 Engineered. Lighting. Solutions.

LED Headlights - Model 8700 EVO 2 PRO

APPLICATIONS

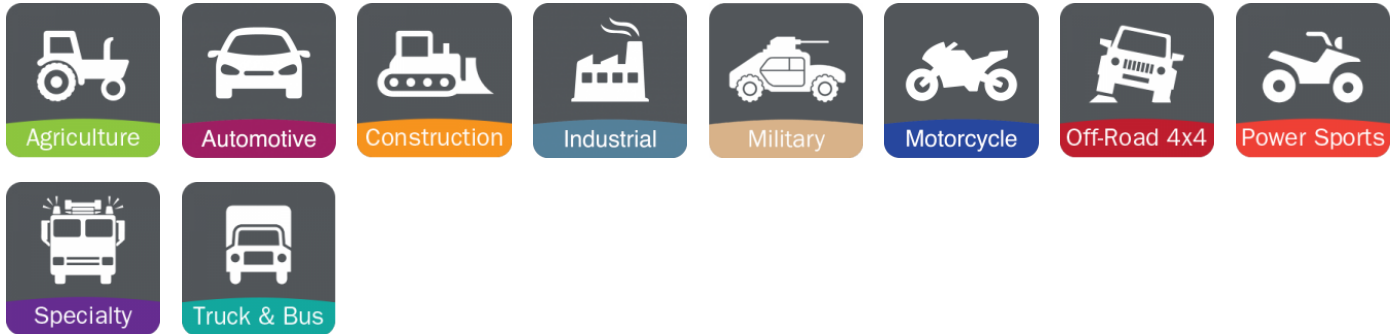

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number
0559951

12-24V ECE LED RHT
Fired Rated High &
Low Beam Headlight
with DRL & Black Inner
Bezel - Single Light



Part Number
8201111

Black Polycarbonate
Bucket for 7" Round
(PAR56) Headlight

Print date: 2025-08-19

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

LED Headlights - Model 8700 EVO 2 PRO

RELATED PRODUCTS



Part Number
0556951

12-24V ECE LHT High
& Low Beam Headlight
with DRL - Chrome



Part Number
0556961

12-24V ECE LHT High
& Low Beam Headlight
with DRL - Black



Part Number
0556981

12-24V ECE RHT High
& Low Beam Headlight
with DRL - Black



Part Number
0557501

12-24V ECE LED LHT
High & Low Beam
Headlight with Black
Inner Bezel - Single
Light



Part Number
0557511

12-24V ECE LED RHT
High & Low Beam
Headlight with Black
Inner Bezel - Single
Light