
#### **PRODUCT INFORMATION**

Description	12-24V ECE LED LHT Non-Heated Headlight - 2 Light Kit	
Height	94.53 mm / 3.72 in	
Width	291.58 mm / 11.48 in	Construction Aller
Depth	133.17 mm / 5.24 in	
Shape	Rectangular	and a
<b>Outer Lens Material</b>	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Xenoy	TTHE REPAIRS
Housing Color	Black	
Bezel Color	Black	
Mounting Hardware Description	(x4) M8-1.25 x 25 mm OR (x2) 1/2"-13 x 1.75" SS Carraige Bolt	
Mounting Type	Universal Pedestal Mount	
Retrofits	Pedestal Mount Snow Plow Lights	MODEL
Mating Connector	Delphi (#12052848)	9800
Product Weight	9.06 lbs / 4.11 kgs	
Shipping Weight	10.21 lbs / 4.63 kgs	

#### **PRODUCT DIMENSIONS**



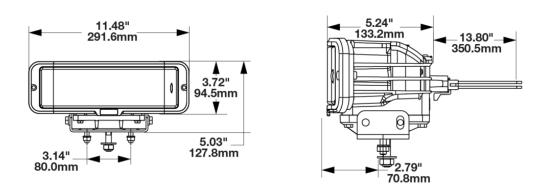

### **ELECTRICAL SPECIFICATIONS**

Input Voltage	12-24V DC	
Operating Voltage	10-32V DC	
Red Wire	Front Position	
Black Wire	Ground	
White Wire	High Beam	
Yellow Wire	Turn	
Blue Wire	DRL	
Orange Wire	Low Beam	
Current Draw	2.70A @ 12V DC (Low Beam) 3.40A @ 12V DC (High Beam) 0.85A @ 12V DC (Turn Signal) 0.04A @ 12V DC (Front Position / DRL) 1.20A @ 24V DC (Low Beam) 1.60A @ 24V DC (High Beam) 0.27A @ 24V DC (Turn Signal) 0.03A @ 24V DC (Front Position / DRL)	

## **REGULATORY STANDARDS COMPLIANCE**




Buy America Standards ECE Reg 112 ECE Reg 7 IEC IP67

ECE Reg 10 ECE Reg 6 ECE Reg 87



### **PHOTOMETRIC SPECIFICATIONS**

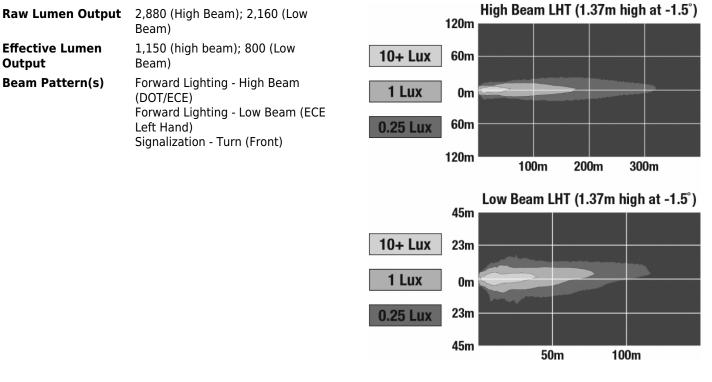

#### **APPLICATIONS**



#### **INSTALLATION & APPLICATION INFORMATION**

Pedestal mount snow plow lights for single or double bolt mounts. Each lamp comes with mounting hardware for single bolt mount included ( $1/2-13 \times 1.75$  SS Carriage Bolt with hex nut and washer), in addition to the 2 M8-1.25 x 25 SS Carriage Bolts for double bolt mounts.



## **ADDITIONAL INFORMATION**

J.W. Speaker's Model 9800 is best suited for normal snow plowing, not "high speed" plowing on highways. Consult with your J.W. Speaker salesperson for more information.

The Model 9800 is not designed to be a plug and play for Boss snow plows. If you have a Boss snow plow please see your local Boss dealer for information on the right product to use.

Lamp design integrates acceptance of mating connector Delphi #1205848

#### **PRODUCT WARNINGS**

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

#### **RELATED PRODUCTS**



Part Number 0550061 12-24V DOT LED Non-Heated Headlight - 2 Light Kit



Part Number 0550161 12-24V ECE LED RHT Non-Heated Headlight - 2 Light Kit



Part Number 0551803 24V DOT LED Heated Headlight - 2 Light Kit



Part Number 0551833 24V ECE LED RHT Heated Headlight - 2 Light Kit



Part Number 0551863 24V ECE LED LHT Heated Headlight - 2 Light Kit





Part Number 0552243 12V DOT LED Heated Headlight - 2 Light Kit



Part Number 0552423 12V ECE LED RHT Heated Headlight - 2 Light Kit



Part Number 0552433 12V ECE LED LHT

Heated Headlight - 2 Light Kit

