
PRODUCT INFORMATION

Description	12V DOT LED Heated Headlight - 2 Light Kit	
Height	94.53 mm / 3.72 in	
Width	291.58 mm / 11.48 in	
Depth	133.17 mm / 5.24 in	
Shape	Rectangular	
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Xenoy	
Housing Color	Black	
Bezel Color	Black	
Mounting Hardware Description	(x4) M8-1.25 x 25 mm OR (x2) 1/2"-13 x 1.75" SS Carraige Bolt	
Mounting Type	Universal Pedestal Mount	MODEL
Retrofits	Pedestal Mount Snow Plow Lights	(9800)
Mating Connector	Delphi (#12052848)	
Product Weight	9.06 lbs / 4.11 kgs	Smart Heat
Shipping Weight	10.21 lbs / 4.63 kgs	HEATED LIGHTING TECHNOLOGY

PRODUCT DIMENSIONS



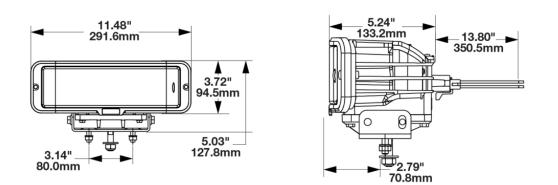

ELECTRICAL SPECIFICATIONS

Input Voltage	12V DC
Operating Voltage	10-15V DC
Red Wire	Front Position
Black Wire	Ground
White Wire	High Beam
Yellow Wire	Turn
Blue Wire	Non-Functioning
Orange Wire	Low Beam
Current Draw	2.70A @ 12V DC (Low Beam) 3.40A @ 12V DC (High Beam) 0.85A @ 12V DC (Turn Signal) 0.04A @ 12V DC (DRL)

REGULATORY STANDARDS COMPLIANCE




Buy America Standards FMVSS 108 s10.1 (Table XIX) FMVSS 108 s7.1 (Table VI) Eco Friendly FMVSS 108 s10.1 (Table XVIII) FMVSS 108 s7.8 (Table XIV)



PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	2,880 (High Beam); 2,160 (Low Beam)
Effective Lumen Output	1,150 (High Beam); 800 (Low Beam)
Candela Output	52,000
Nominal LED Color Temperature	5000 K

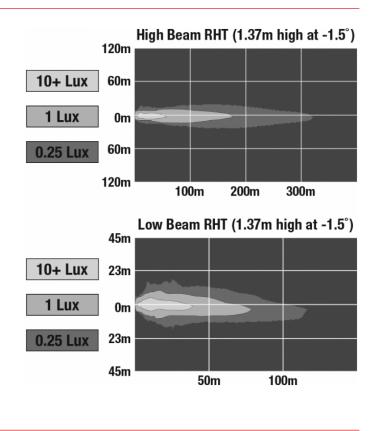

APPLICATIONS



INSTALLATION & APPLICATION INFORMATION

Pedestal mount snow plow lights for single or double bolt mounts. Each lamp comes with mounting hardware for single bolt mount included ($1/2-13 \times 1.75$ SS Carriage Bolt with hex nut and washer), in addition to the 2 M8-1.25 x 25 SS Carriage Bolts for double bolt mounts.





ADDITIONAL INFORMATION

J.W. Speaker's Model 9800 is best suited for normal snow plowing, not "high speed" plowing on highways. Consult with your J.W. Speaker salesperson for more information.

The Model 9800 is not designed to be a plug and play for Boss snow plows. If you have a Boss snow plow please see your local Boss dealer for information on the right product to use.

Lamp design integrates acceptance of mating connector Delphi #1205848

SMARTHEAT™ HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology here.

See Additional Information on page 1 for heated wire installation

PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.



RELATED PRODUCTS





Part Number 0550061 12-24V DOT LED Non-Heated Headlight - 2 Light Kit

Part Number 0550161 12-24V ECE LED RHT Non-Heated Headlight - 2 Light Kit



Part Number 0550171 12-24V ECE LED LHT Non-Heated Headlight - 2 Light Kit



Part Number 0551803 24V DOT LED Heated

Headlight - 2 Light Kit



Part Number 0551833 24V ECE LED RHT Heated Headlight - 2 Light Kit



Part Number 0551863

Light Kit

24V ECE LED LHT



Part Number 0552423 12V ECE LED RHT Heated Headlight - 2 Heated Headlight - 2 Light Kit



Part Number 0552433 12V ECE LED LHT Heated Headlight - 2 Light Kit

