

LED Stop, Tail & Turn Light - Model 267

PRODUCT INFORMATION

Description	12-24V ECE/SAE LED Stop, Tail & Turn Signal Light
Height	98.55 mm / 3.88 in
Width	277.88 mm / 10.94 in
Depth	33.78 mm / 1.33 in
Shape	Rectangular
Outer Lens Material	Acrylic
Outer Lens Color	Amber, Red
Housing Material	ABS
Housing Color	Black
Mounting Hardware Description	(x2) M6-1 x 25mm Mounting Bolts
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 4-Pin Deutsch Socket (DT04-4P)
Mating Connector	4-Pin Deutsch Plug (DT06-4S)
Product Weight	0.00 lbs / 0 kgs




Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Stop, Tail & Turn Light - Model 267

PRODUCT DIMENSIONS

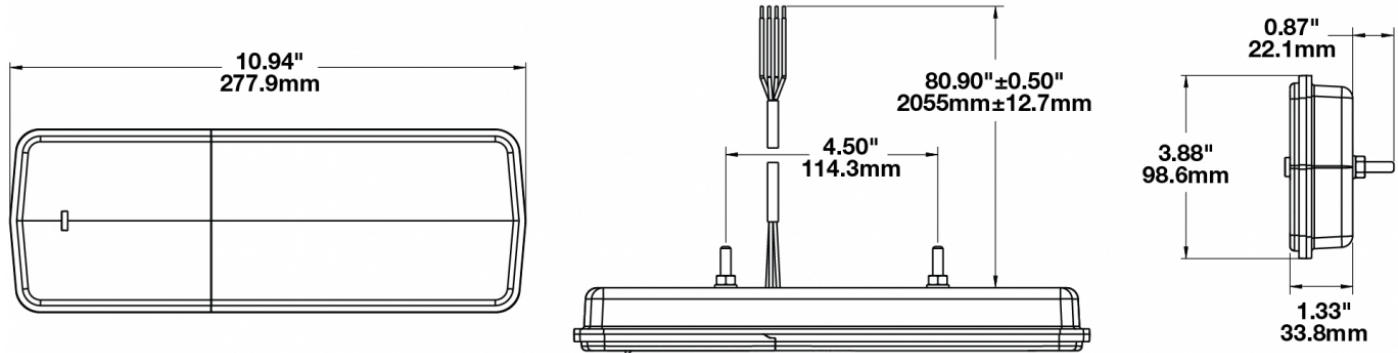

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Red Wire	Stop
White Wire	Tail
Green Wire	Turn
Black Wire	Negative
Current Draw	0.375A @ 12V DC (Stop) 0.250A @ 24V DC (Stop) 0.075A @ 12V DC (Tail) 0.05A @ 24V DC (Tail) 0.450A @ 12V DC (Turn) 0.325A @ 24V DC (Turn)

Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Stop, Tail & Turn Light - Model 267

REGULATORY STANDARDS COMPLIANCE



- | | |
|----------------------|-----------------------|
| ASABE S279 | Buy America Standards |
| ECE Reg 3 | ECE Reg 6 |
| ECE Reg 7 | Eco Friendly |
| FMVSS 108 Table IX | FMVSS 108 Table VII |
| FMVSS 108 Table VIII | FMVSS 108 Table XVI |
| SAE J575 | SAE J585 |
| SAE J586 | SAE J588 |
| SAE J594 | |

PHOTOMETRIC SPECIFICATIONS

- Beam Pattern(s)**
- Signalization - Stop
 - Signalization - Tail
 - Signalization - Turn (Front)
 - Signalization - Turn (Rear)

APPLICATIONS



Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

