

# LED Work Light - Model 735

## PRODUCT INFORMATION

---

<b>Description</b>	12-24V LED Work Light with Flood Beam Pattern
<b>Height</b>	137.16 mm / 5.4 in
<b>Width</b>	144.27 mm / 5.68 in
<b>Depth</b>	66.04 mm / 2.6 in
<b>Shape</b>	Oval
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) 5/16"-18 x 0.58" Mounting Bolt
<b>Mounting Type</b>	Universal Pedestal Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
<b>Mating Connector</b>	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
<b>Product Weight</b>	1.55 lbs / 0.7 kgs
<b>Shipping Weight</b>	1.87 lbs / 0.85 kgs



---


**Print date: 2018-05-22**

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
Engineered. Lighting. Solutions.

# LED Work Light - Model 735

## PRODUCT DIMENSIONS

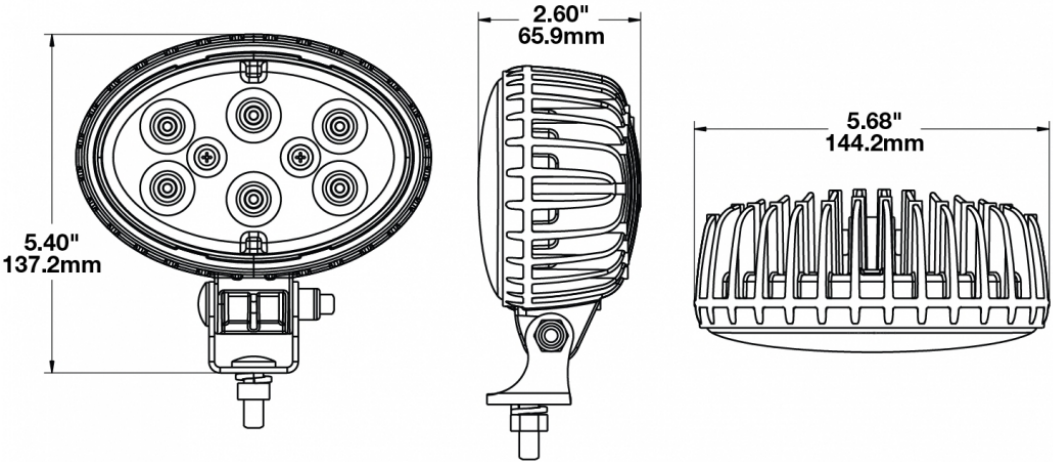

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12-24V DC
<b>Operating Voltage</b>	10-36V DC
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Current Draw</b>	3.50A @ 12V DC 1.75A @ 24V DC

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards  
IEC IP69K

Eco Friendly

Print date: 2018-05-22


© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



# LED Work Light - Model 735

## PHOTOMETRIC SPECIFICATIONS

**Raw Lumen Output** 3,900  
**Effective Lumen Output** 2,600  
**Nominal LED Color Temperature** 5700 K  
**Beam Pattern(s)** Forward Lighting - Flood (Standard)

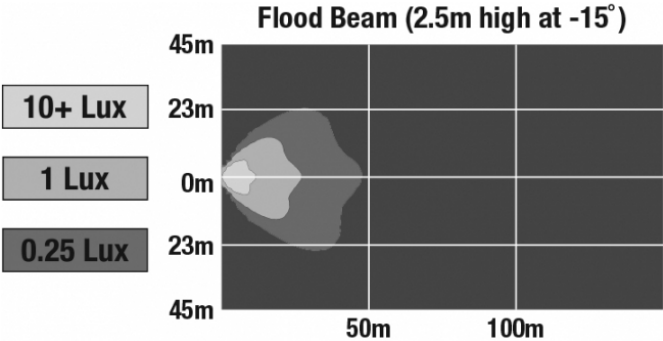

## APPLICATIONS



## RELATED PRODUCTS



**Part Number**  
**1706571**  
 12-24V LED Work Light with Spot Beam Pattern



**Part Number**  
**1706581**  
 12-24V LED Work Light with Trapezoid Beam Pattern