

LED Work Lights - Model 880 XD

PRODUCT INFORMATION

| | |
|--------------------------------------|--------------------------------------------------------------|
| Description | 12-24V LED Work Light with Spot Beam Pattern & On/Off Switch |
| Height | 133.35 mm / 5.25 in |
| Width | 137.16 mm / 5.4 in |
| Depth | 47.75 mm / 1.88 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Hardware Description | (x1) 5/16"-18 x 1.00" Mounting Bolt |
| Mounting Type | Universal Pedestal Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P) |
| Mating Connector | 2-Pin Deutsch Weather-Proof Plug (DT06-2S) |
| Product Weight | 0.82 lbs / 0.37 kgs |
| Shipping Weight | 1.16 lbs / 0.53 kgs |




Print date: 2026-06-04

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

LED Work Lights - Model 880 XD

PRODUCT DIMENSIONS

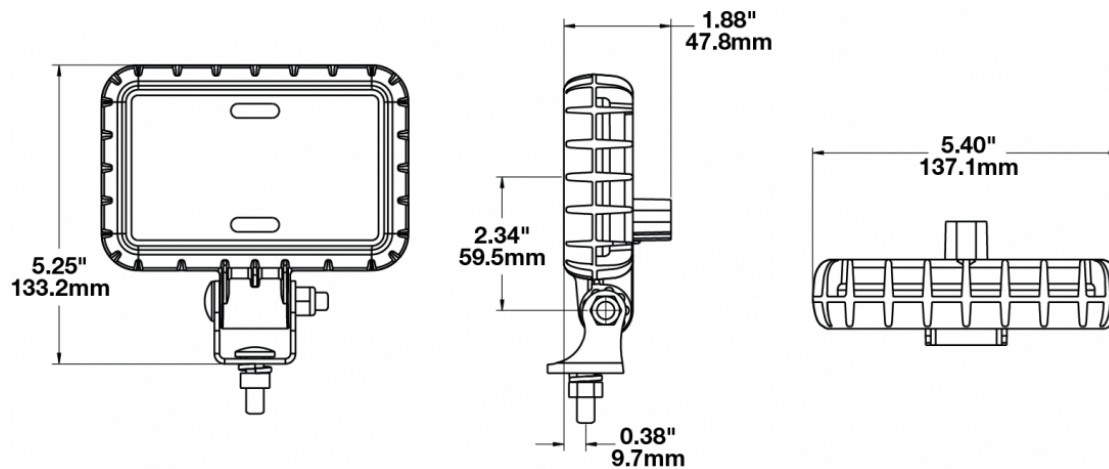

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-32V DC |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 1.20A @ 12V DC 0.60A @ 24V DC |

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
IEC IP69K

Eco Friendly
SAE J1455

Print date: 2026-06-04


© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Work Lights - Model 880 XD

PHOTOMETRIC SPECIFICATIONS

| | |
|-------------------------------|-------------------------|
| Raw Lumen Output | 1,680 |
| Effective Lumen Output | 700 |
| Nominal LED Color Temperature | 5000 K |
| Beam Pattern(s) | Forward Lighting - Spot |

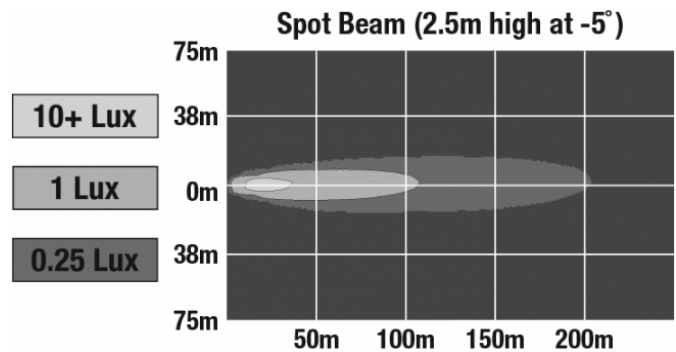

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠️ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠️ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2026-06-04

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Work Lights - Model 880 XD

RELATED PRODUCTS



Part Number
1603241

12-24V LED Work Light
with Spot Beam
Pattern



Part Number
1603251

12-24V LED Work Light
with Trapezoid Beam
Pattern



Part Number
1603261

12-24V LED Work Light
with Flood Beam
Pattern



Part Number
1603321

12-24V LED Work Light
with Trapezoid Beam
Pattern & On/Off
Switch



Part Number
1603331

12-24V LED Work Light
with Flood Beam
Pattern & On/Off
Switch