

Model 8700 EVO-X Headlight

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V ECE LED LHT 5-in-1 Headlight with Chrome Bezel |
| Height | 177.20 mm / 6.98 in |
| Width | 177.20 mm / 6.98 in |
| Depth | 84.35 mm / 3.32 in |
| Shape | Round |
| Outer Lens Material | Hardcoated Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Bezel Color | Chrome |
| Retrofits | 2D1 "PAR56" or 7" Round Headlights |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | integrated 6-pin Deutsch |
| Mating Connector | Deutsch DT06-6S |




Print date: 2026-05-26

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660


J.W. SPEAKER 
Engineered. Lighting. Solutions.

Model 8700 EVO-X Headlight

PRODUCT DIMENSIONS

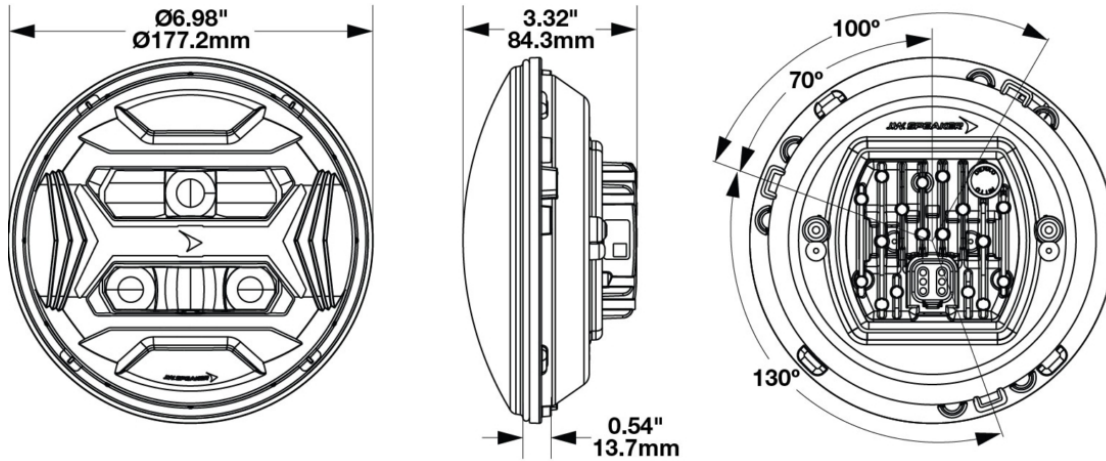

View: Back of Lamp
6-Pin Deutsch

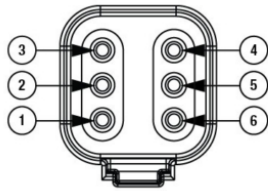

| PIN | FUNCTION |
|-------|-----------------------|
| PIN 1 | Front Position |
| PIN 2 | Daytime Running Light |
| PIN 3 | Direction Indicator* |
| PIN 4 | Ground |
| PIN 5 | Low Beam |
| PIN 6 | High Beam |

Note: Reference number on Deutsch Connector
*Direction Indicator (DI) is not DOT compliant

Print date: 2026-05-26

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Model 8700 EVO-X Headlight

ELECTRICAL SPECIFICATIONS

| | |
|--------------------------|--|
| Input Voltage | 12-24V DC |
| Operating Voltage | 9-32V DC |
| Current Draw | 2.09A @ 12V DC (Low Beam) 1.13A @ 24V DC (Low Beam) 4.52A @ 12V DC (High Beam) 2.21A @ 24V DC (High Beam) 0.26A @ 12V DC (Front Position) 0.15A @ 24V DC (Front Position) 2.52A @ 12V DC (DRL) 1.28A @ 24V DC (DRL) 2.95A @ 12V DC (Direction Indicator) 1.53A @ 24V DC (Direction Indicator) |

REGULATORY STANDARDS COMPLIANCE



ECE Reg 10
ECE Reg 148 - A
ECE Reg 149 - C
IEC IP67



ECE Reg 148 - 1b
ECE Reg 148 - RL
ECE Reg 149 - HR
IEC IP69K

Print date: 2026-05-26


© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

Model 8700 EVO-X Headlight

PHOTOMETRIC SPECIFICATIONS

| | |
|--------------------------------------|---|
| Raw Lumen Output | 3,740 (High beam), 2,330 (Low Beam) |
| Effective Lumen Output | 1,455 (High Beam), 765 (Low beam) |
| Nominal LED Color Temperature | 5700 K |
| Beam Pattern(s) | Forward Lighting - Daytime Running Light Forward Lighting - High Beam (ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Front Position Signalization - Turn (Front) |

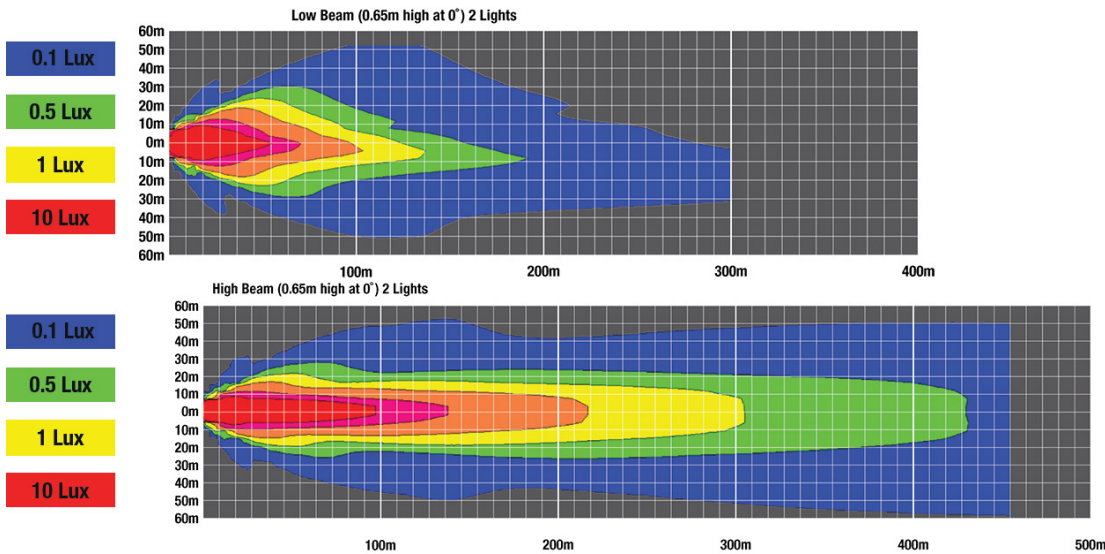

APPLICATIONS



Print date: 2026-05-26

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Model 8700 EVO-X Headlight

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number
3272541
High Beam/Low Beam
and Front Position H4
Harness



Part Number
3272551
High Beam and Low
Beam H4 Harness



Part Number
3272681
5-in-1 Flying Lead
Harness

Model 8700 EVO-X Headlight

RELATED PRODUCTS




Part Number
0562231
12-24V DOT/ECE LED
RHT 5-in-1 Headlight
with Black Bezel




Part Number
0562241
12-24V DOT/ECE LED
RHT 5-in-1 Headlight
with Chrome Bezel




Part Number
0562251
12-24V DOT/ECE LED
RHT 5-in-1 Heated
Headlight with Black
Bezel




Part Number
0562261
12-24V DOT/ECE LED
RHT 5-in-1 Heated
Headlight with Chrome
Bezel



Part Number
0562271
12-24V DOT/ECE LED
High and Symmetric
Low Beam Headlight
with Front Position
with Black Bezel



Part Number
0562281
12-24V DOT/ECE LED
High and Symmetric
Low Beam Headlight
with Front Position
with Chrome Bezel



Part Number
0562291
12-24V ECE LED LHT
5-in-1 Headlight with
Black Bezel



Part Number
0562331
12-24V DOT LED RHT
High and Low Beam
Headlight with Black
Bezel