
## Oval LED Work Lights - Model 7250 XD

#### **PRODUCT INFORMATION**

| Description                      | 12-24V LED Work Light with Trapezoid<br>Beam Pattern & Pedestal Mount |            |
|----------------------------------|---|------------|
| Height                           | 152.40 mm / 6 in  |            |
| Width                            | 170.18 mm / 6.7 in  |            |
| Depth                            | 68.58 mm / 2.7 in   |            |
| Shape                            | Oval  |            |
| Outer Lens Material              | Polycarbonate   |            |
| Outer Lens Color                 | Clear   |            |
| Housing Material                 | Polycarbonate   |            |
| Housing Color                    | Black   |            |
| Mounting Hardware<br>Description | (x1) 3/8-16 x 1.5" Stainless Steel Hex<br>Head Bolt                   | ( 17250 XP |
| Minimum Operating<br>Temperature | -40 °C / -40 °F   |            |
| Maximum Operating<br>Temperature | 65 °C / 149 °F  |            |
| <b>Connector or Wiring</b>       | Deutsch DT04-2P   |            |
| Mating Connector                 | Deutsch DT06-2S   |            |
| Product Weight                   | 0.80 lbs / 0.36 kgs   |            |
| Shipping Weight                  | 2.80 lbs / 1.27 kgs   |            |
|                                  |   |            |

## **PRODUCT DIMENSIONS**

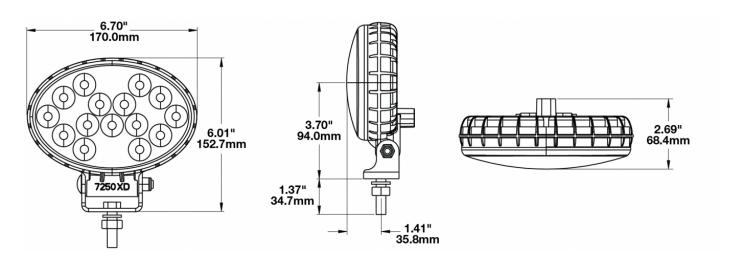

## Print date: 2024-04-19

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



## Oval LED Work Lights - Model 7250 XD

## **ELECTRICAL SPECIFICATIONS**

| Input Voltage     | 12-24V DC                        |
|-------------------|----------------------------------|
| Operating Voltage | 10-32V DC                        |
| Black Wire        | Ground                           |
| Red Wire          | Power                            |
| Current Draw      | 1.60A @ 12V DC<br>0.90A @ 24V DC |


## **REGULATORY STANDARDS COMPLIANCE**



Buy America Standards CISPR 22 IEC IP69K UL Recognized CISPR 12 Eco Friendly SAE J1113-13

#### **PHOTOMETRIC SPECIFICATIONS**

| Raw Lumen Output                 | 3715                         |
|----------------------------------|------------------------------|
| Effective Lumen<br>Output        | 2204                         |
| Nominal LED Color<br>Temperature | 5700 K                       |
| Beam Pattern(s)                  | Forward Lighting - Trapezoid |

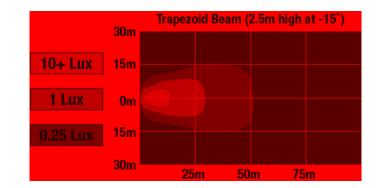



# Oval LED Work Lights - Model 7250 XD

## **APPLICATIONS**



## **PRODUCT WARNINGS**

For California residents:

**WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

**AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

## ACCESSORIES



**Part Number** 8200491 Mounting Kit For Work Lights

## **RELATED PRODUCTS**



Part Number 1801501 12-24V LED Work Light 12-24V LED Work Light with Spot Beam Pattern & Pedestal Mount



Part Number 1801521 with Flood Beam Pattern & Pedestal Mount

Print date: 2024-04-19 © 2024 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

