

LED Tail Lights - Model 225

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V ECE/SAE LED Stop, Tail & Turn Signal Light |
| Height | 119.38 mm / 4.7 in |
| Width | 175.26 mm / 6.9 in |
| Depth | 27.94 mm / 1.1 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Amber |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Bezel Color | N/A |
| Mounting Hardware Description | (x2) #8-15 x 1-3/4" Stainless Steel Screw |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | Deutsch DT04-4P |
| Mating Connector | Deutsch DT06-4S |
| Product Weight | 0.47 lbs / 0.21 kgs |
| Shipping Weight | 1.40 lbs / 0.64 kgs |




Print date: 2018-06-18

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
 Engineered. Lighting. Solutions.

LED Tail Lights - Model 225

PRODUCT DIMENSIONS

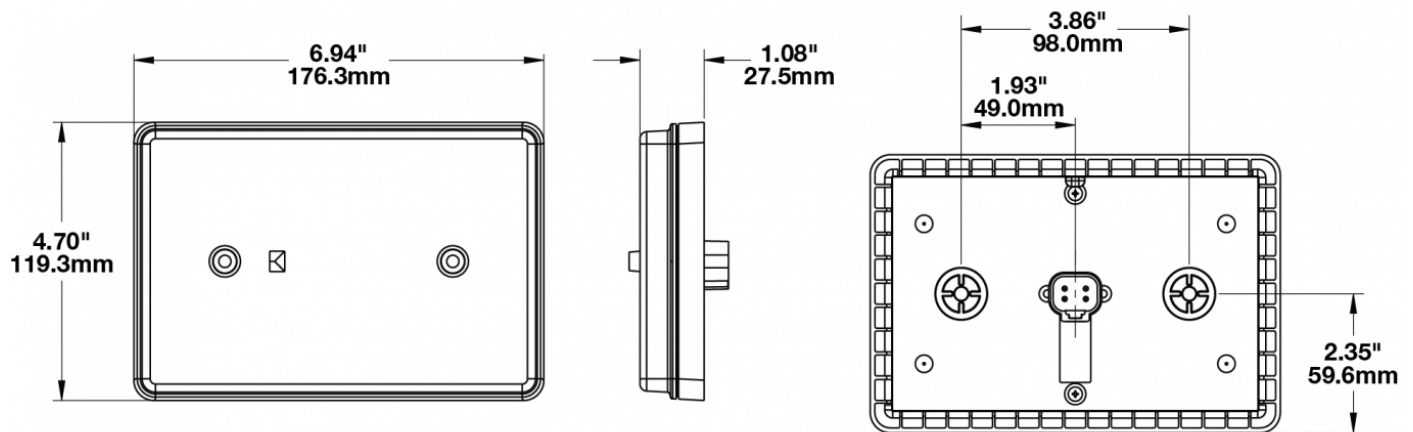

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 10-32V DC |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses |
| Black Wire | Ground |
| Red Wire | Stop |
| White Wire | Tail |
| Yellow Wire | Turn |
| Current Draw | 1.40A @ 12V DC 0.86A @ 24V DC |

Print date: 2018-06-18

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Tail Lights - Model 225

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
 ECE Reg 7
 IEC IP67

ECE Reg 6
 Eco Friendly
 IEC IP69K

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Stop
 Signalization - Tail
 Signalization - Turn (Front)
 Signalization - Turn (Rear)

APPLICATIONS



Print date: 2018-06-18

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

